

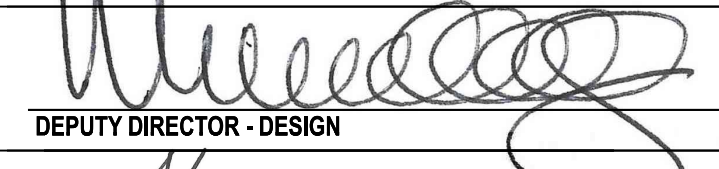

- NOTES:**
- 1). CURB SHOWN IS CONCEPTUAL ONLY. INSTALL CURB PER PLANS.
 - 2). IF NO CURB IS REQUIRED, INSTALL SPEED HUMP TO THE FULL WIDTH OF ROADWAY.
 - 3). INSTALL STRIPING IN ACCORDANCE WITH THE DE MUTCD.
 - 4). INSTALL SPEED HUMP SIGNS (W17-1) IN ACCORDANCE WITH THE DE MUTCD.
 - 5). PROVIDE AND INSTALL DELINEATORS IN ACCORDANCE WITH THE CONTRACT.
 - 6). SEAL ALL JOINTS IN ACCORDANCE WITH SECTION 401.




 Andrew Shott
 ENGINEERING SUPPORT
 12/22/2023
 DATE
RECOMMENDED

SPEED HUMP

STANDARD NO. P-7 (2024) **SHT.** 1 **OF** 1

REVIEWED 
 DEPUTY DIRECTOR - DESIGN 22 December 2023
 DATE
APPROVED 
 CHIEF ENGINEER 01/11/2024
 DATE