



**PLAN VIEW**

**NOTES:**


- 1). TYPE 5 CONDUIT JUNCTION WELL SHALL BE PRECAST CONCRETE. AT LEAST ONE HOLE IN PRECAST WELLS WILL BE OF A 5" DIAMETER COMPLETELY THROUGH THE WALL. UNUSED HOLES SHALL BE PLUGGED.
- 2). CONDUIT JUNCTION WELLS SHALL NOT BE PLACED WITHIN OR UNDER THE TRAVELWAY.
- 3). ALL CONDUIT JUNCTION WELLS PLACED IN PAVED AREAS SHALL BE CONSTRUCTED FLUSH WITH THE FINISHED GRADE. ALL CONDUIT JUNCTION WELLS PLACED IN UNPAVED AREAS SHALL BE CONSTRUCTED ABOVE GRADE AND GRADED TO DRAIN AWAY FROM THE WELL, AS DETAILED.
- 4). ALL CRACKS, GAPS, OR OPENINGS IN JUNCTION WELL WALL SHALL BE SEALED WITH CONCRETE.

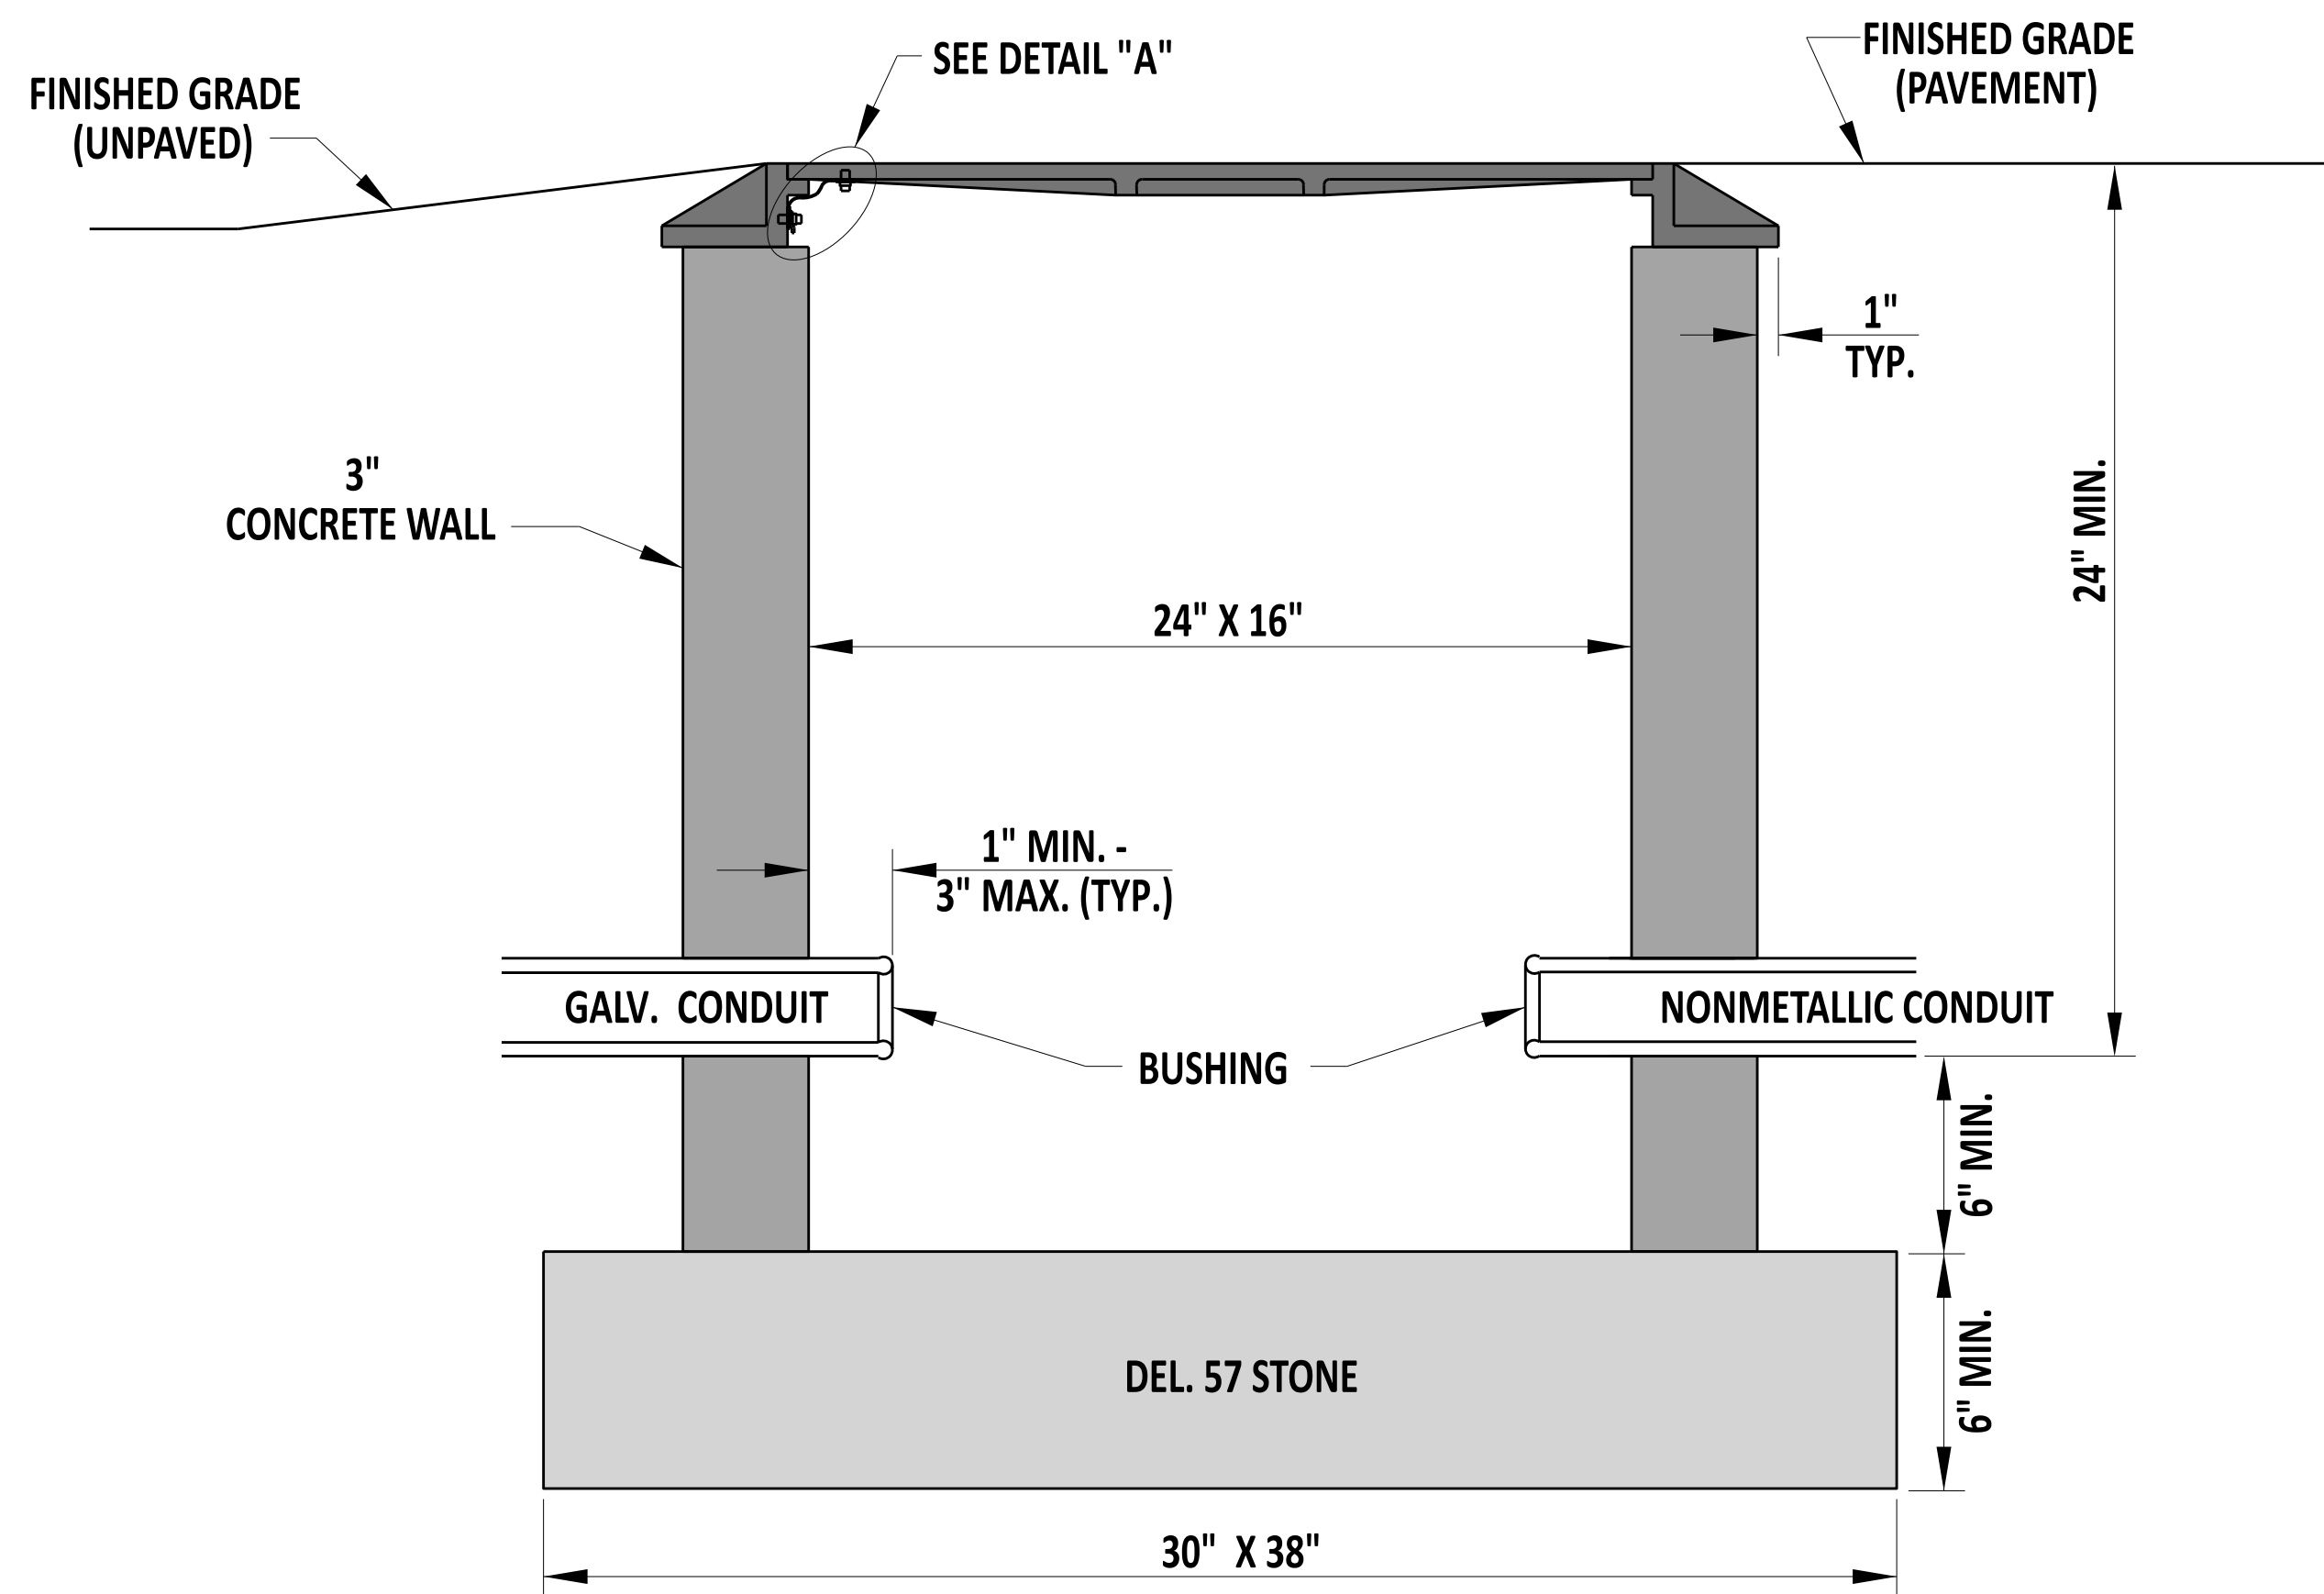

**SECTION A-A**

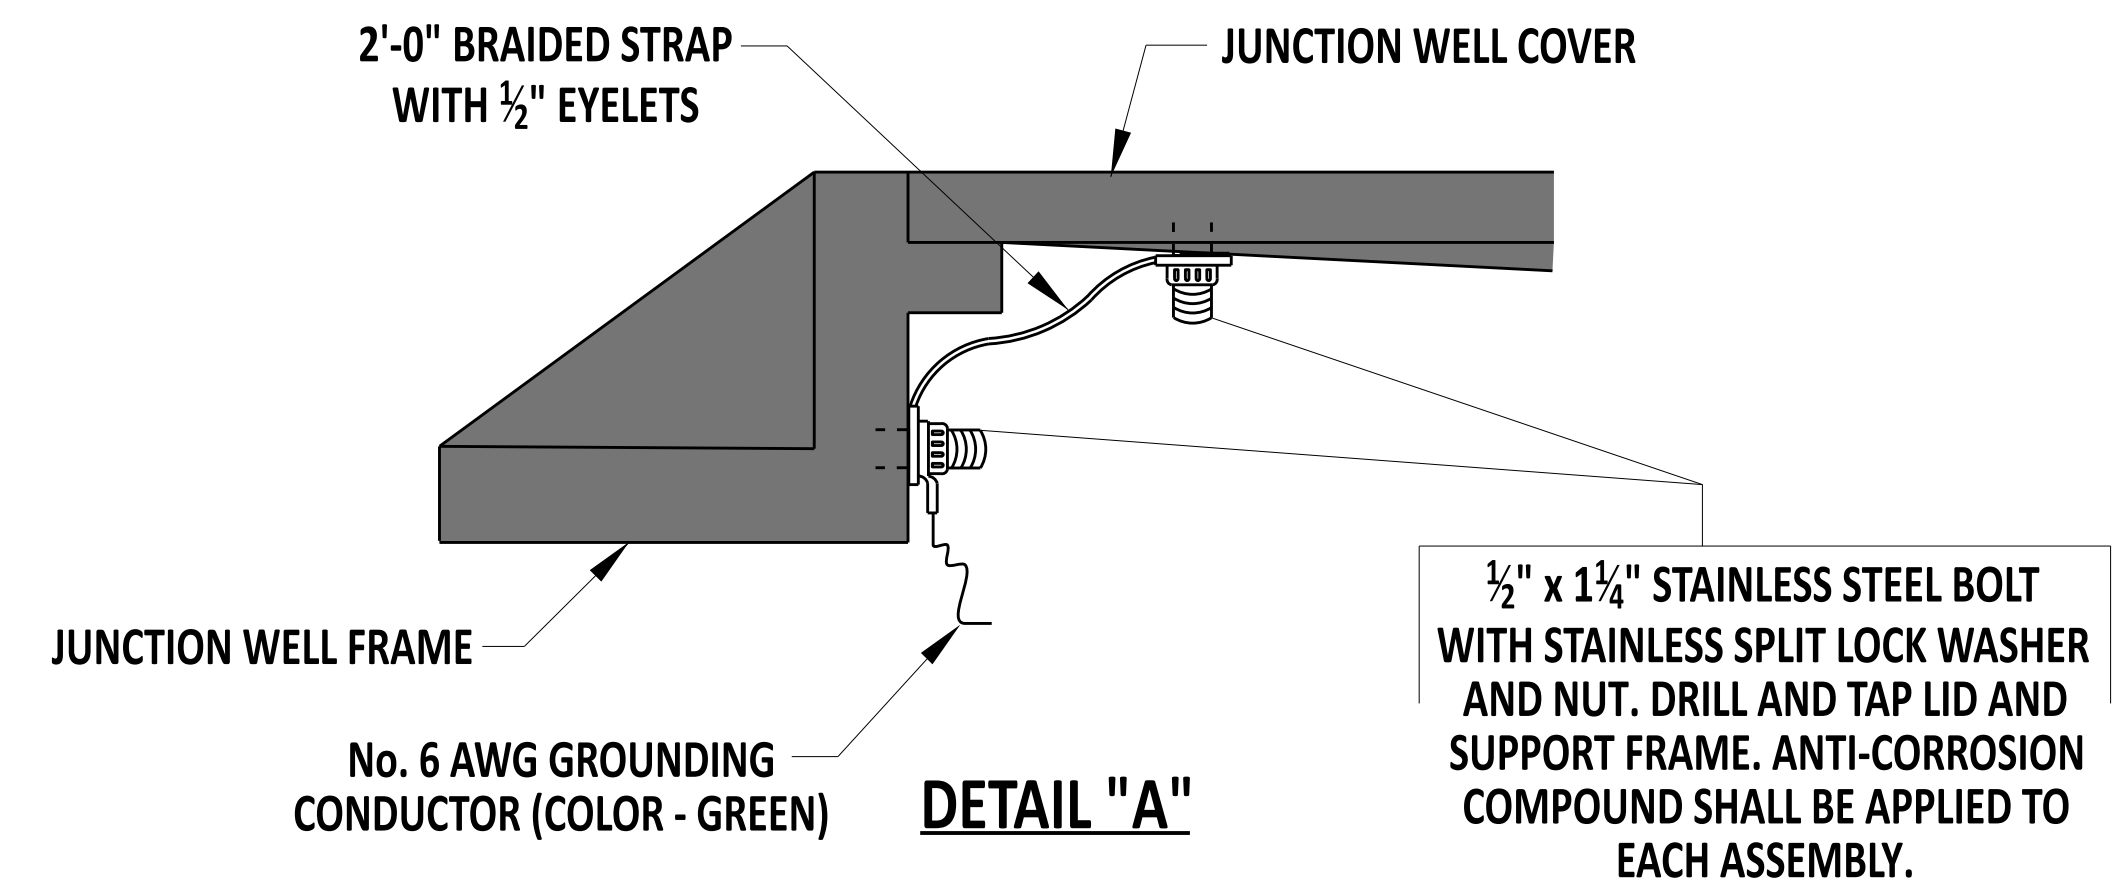

**DETAIL "A"**

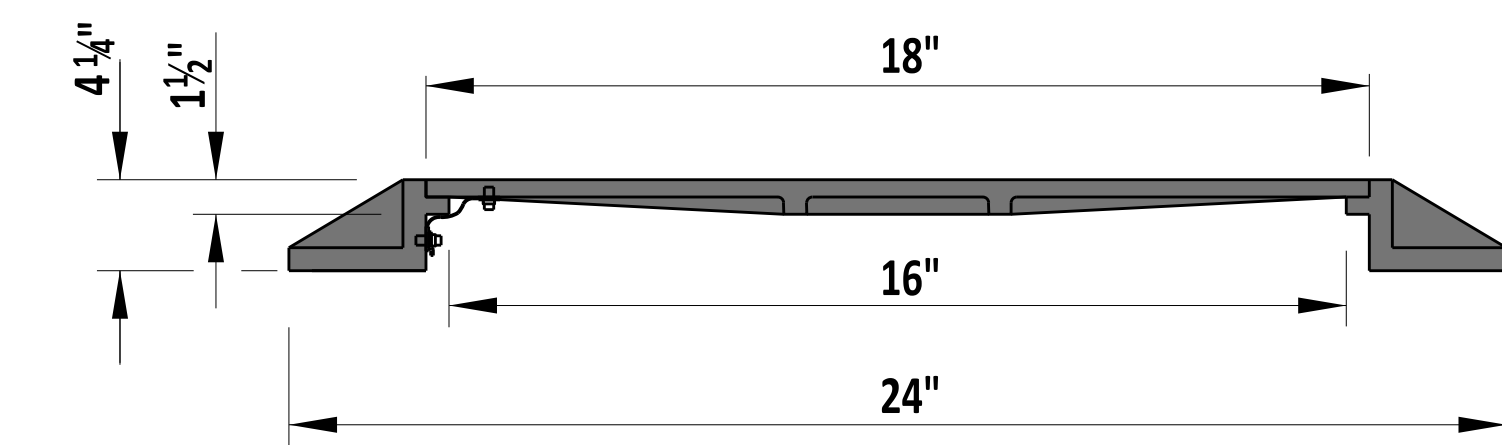

**SECTION B-B**



*Andrew Short*  
 ENGINEERING SUPPORT  
 RECOMMENDED  
 DATE 12/22/2023

**CONDUIT JUNCTION WELL, TYPE 5**  
 STANDARD NO. T-1 (2024)  
 SHT. 3 OF 4

REVIEWED  
 APPROVED  
 DEPUTY DIRECTOR - DESIGN  
 CHIEF ENGINEER  
 22 December 2023  
 DATE  
 01/11/2024  
 DATE