

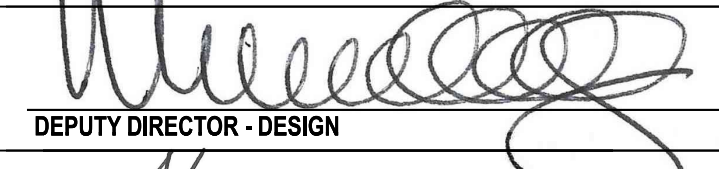
- NOTES:**
- 1). UPRIGHT CONFIGURATION SHALL BE USED FOR MOUNTING ON MAST ARMS, SIGNAL HEAD FRAMEWORKS AND PEDESTALS.
 - 2). UPRIGHT MOUNTING HARDWARE SHALL BE SUPPLIED BY THE CONTRACTOR.
 - 3). TEFLON TAPE SHALL BE APPLIED TO THREADS BEFORE MOUNTING.
 - 4). ROUTE THE LEAD-IN CABLE THROUGH THE METAL CAP AND THE RUBBER PLUG. REPLACE THE METAL CAP, SEALING THE CABLE ENTRY PORT. TIGHTEN THE METAL CAP SO THE CABLE WILL NOT SLIDE THROUGH THE RUBBER PLUG.





 Andrew Short
 ENGINEERING SUPPORT
 12/22/2023
 DATE
RECOMMENDED

EMERGENCY PREEMPTION RECEIVER - UPRIGHT MOUNT

STANDARD NO. T-14 (2024) **SHT.** 1 **OF** 2

REVIEWED 
 DEPUTY DIRECTOR - DESIGN 22 December 2023
 DATE

APPROVED 
 CHIEF ENGINEER 01/11/2024
 DATE