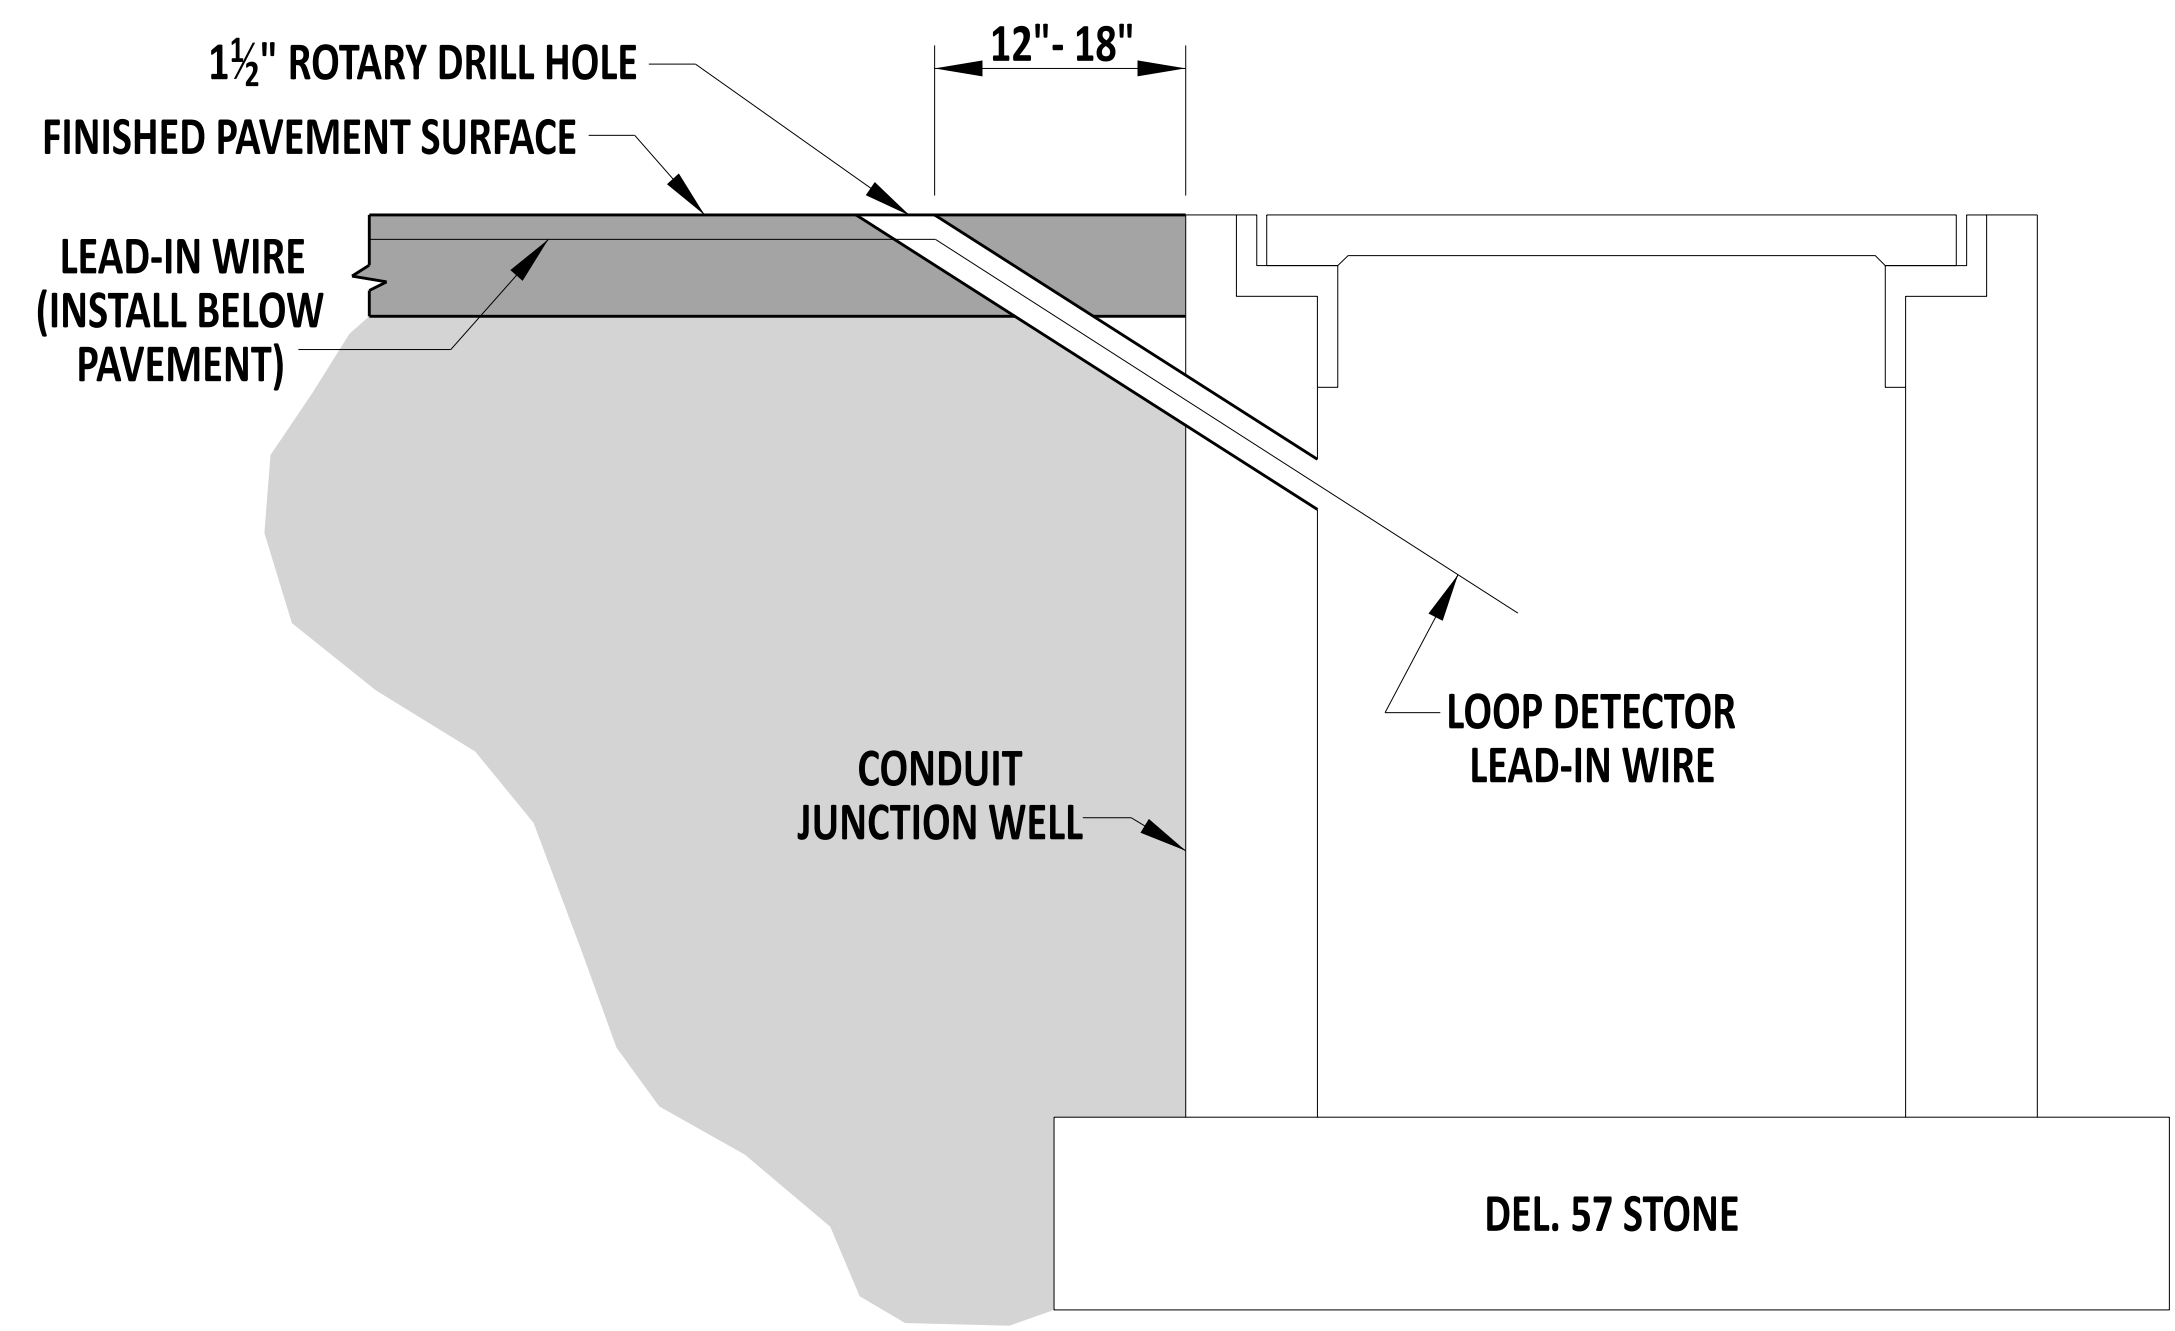


**LOOP DETECTOR
LEAD-IN WIRE INSTALLATION**



**LOOP DETECTOR
LEAD-IN WIRE INSTALLATION**

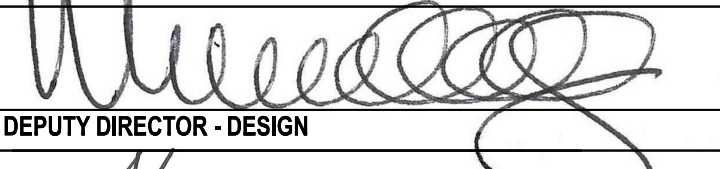

NOTES:

- 1). ALL SAWCUTS SHALL BE A DEPTH OF 3 1/2" ON ALL SURFACES.
- 2). CONTRACTOR SHALL INSTALL LEAD-IN WIRE IN THE MOST DIRECT ROUTE TO THE JUNCTION WELL USING THE CLOSEST CONCRETE CURB JOINT.
- 3). ALL SAWCUTS SHALL BE PATCHED WITH NON-SHRINK CONCRETE CAULK.
- 4). CONTRACTOR SHALL CORE AT FULL DEPTH OF SAWCUT, 3 1/2".
- 5). CONTRACTOR SHALL INSTALL DETECTABLE WARNING TAPE IN TRENCH FOR LEAD-IN CONDUIT.




 Andrew Short
 ENGINEERING SUPPORT
 12/22/2023
 DATE
RECOMMENDED

**LOOP DETECTOR LEAD-IN WIRE INSTALLATION - JUNCTION WELL WITH
 SIDEWALK AND GRASS STRIPS AND DIRECTLY ADJACENT TO PAVED SURFACE**
 STANDARD NO. T-8 (2024) SHT. 4 OF 4

REVIEWED

 DEPUTY DIRECTOR - DESIGN
 22 December 2023
 DATE
APPROVED

 CHIEF ENGINEER
 01/11/2024
 DATE