
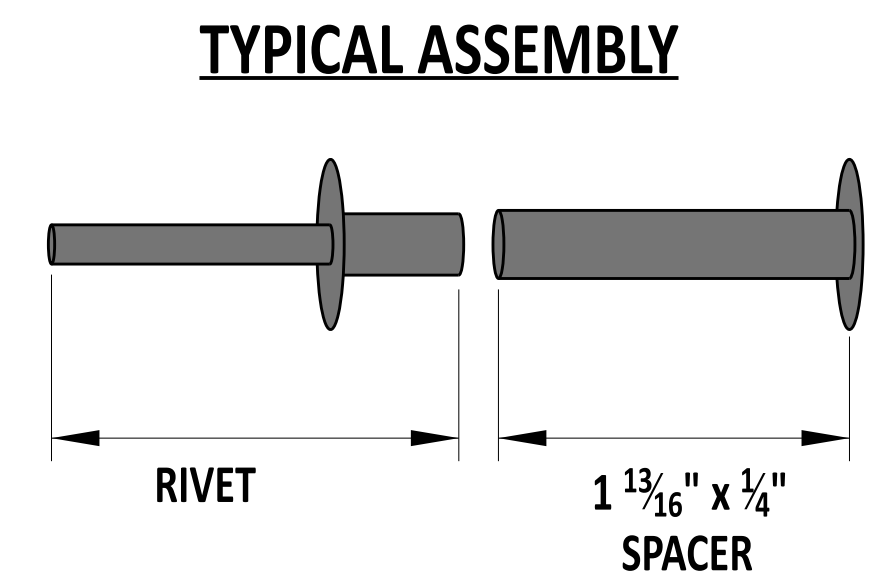
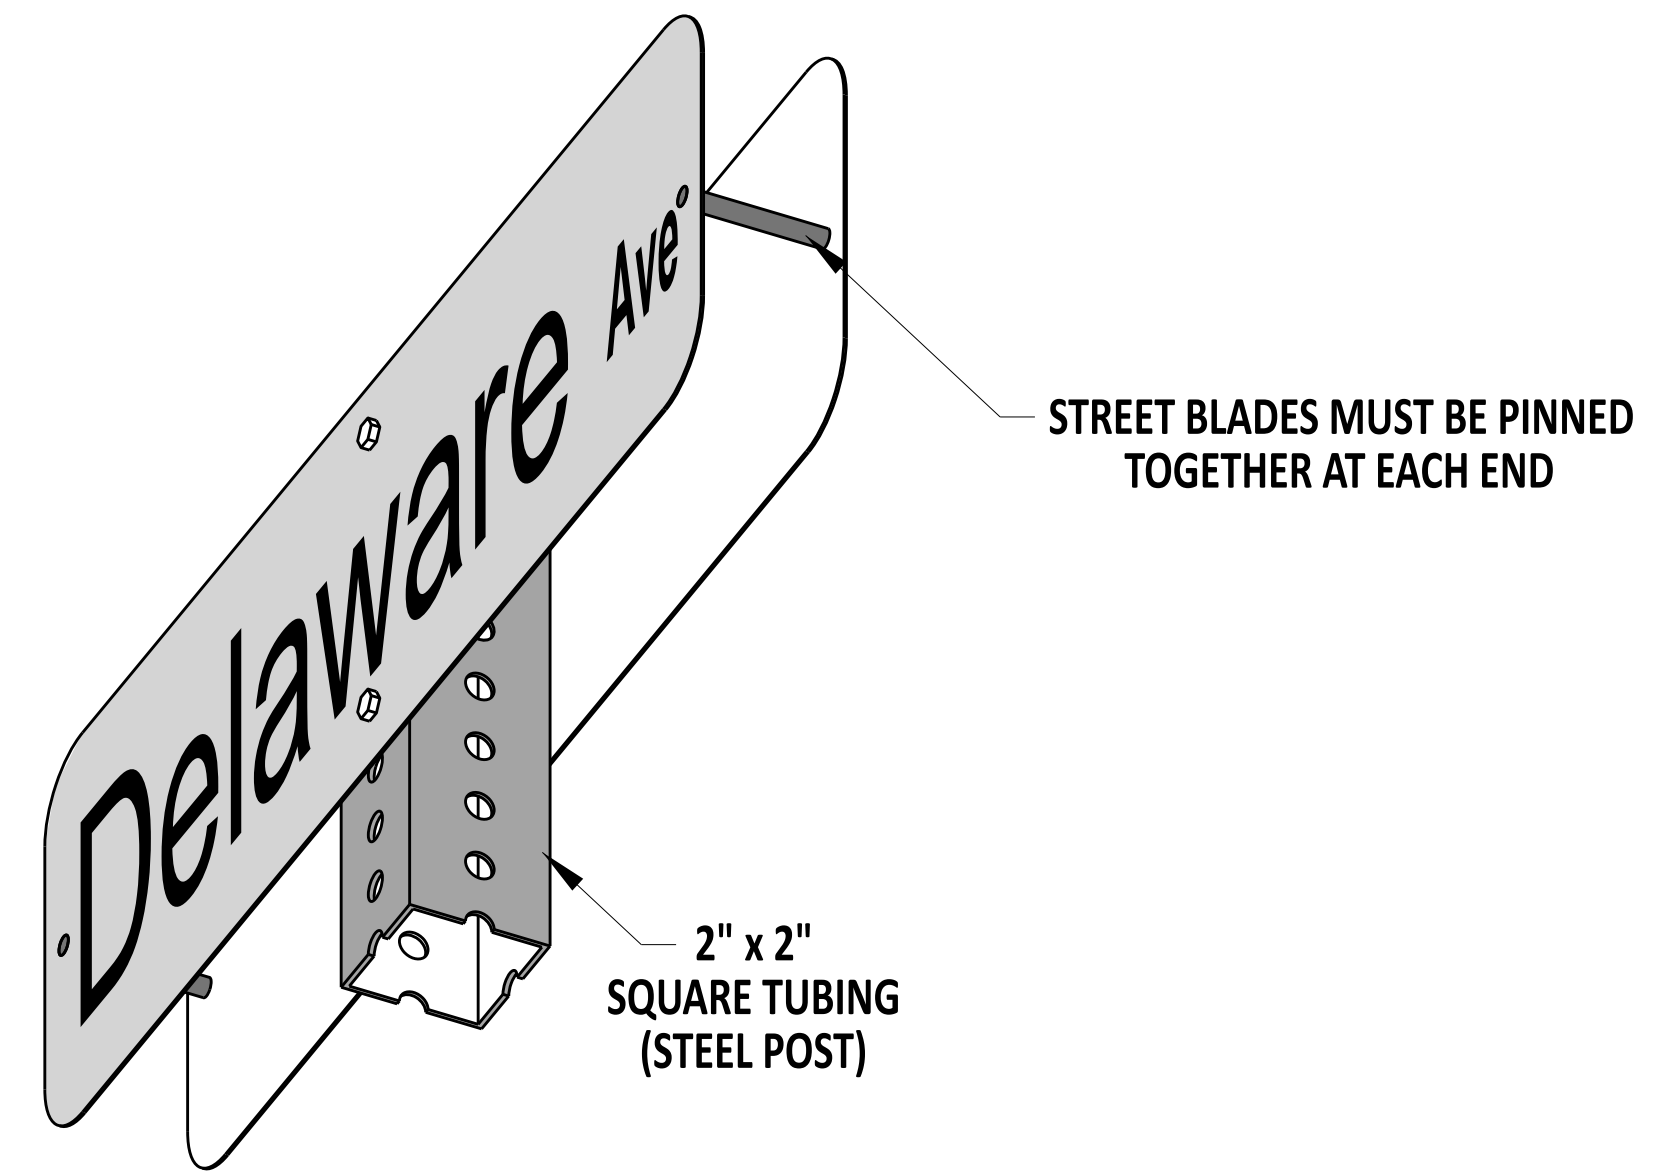
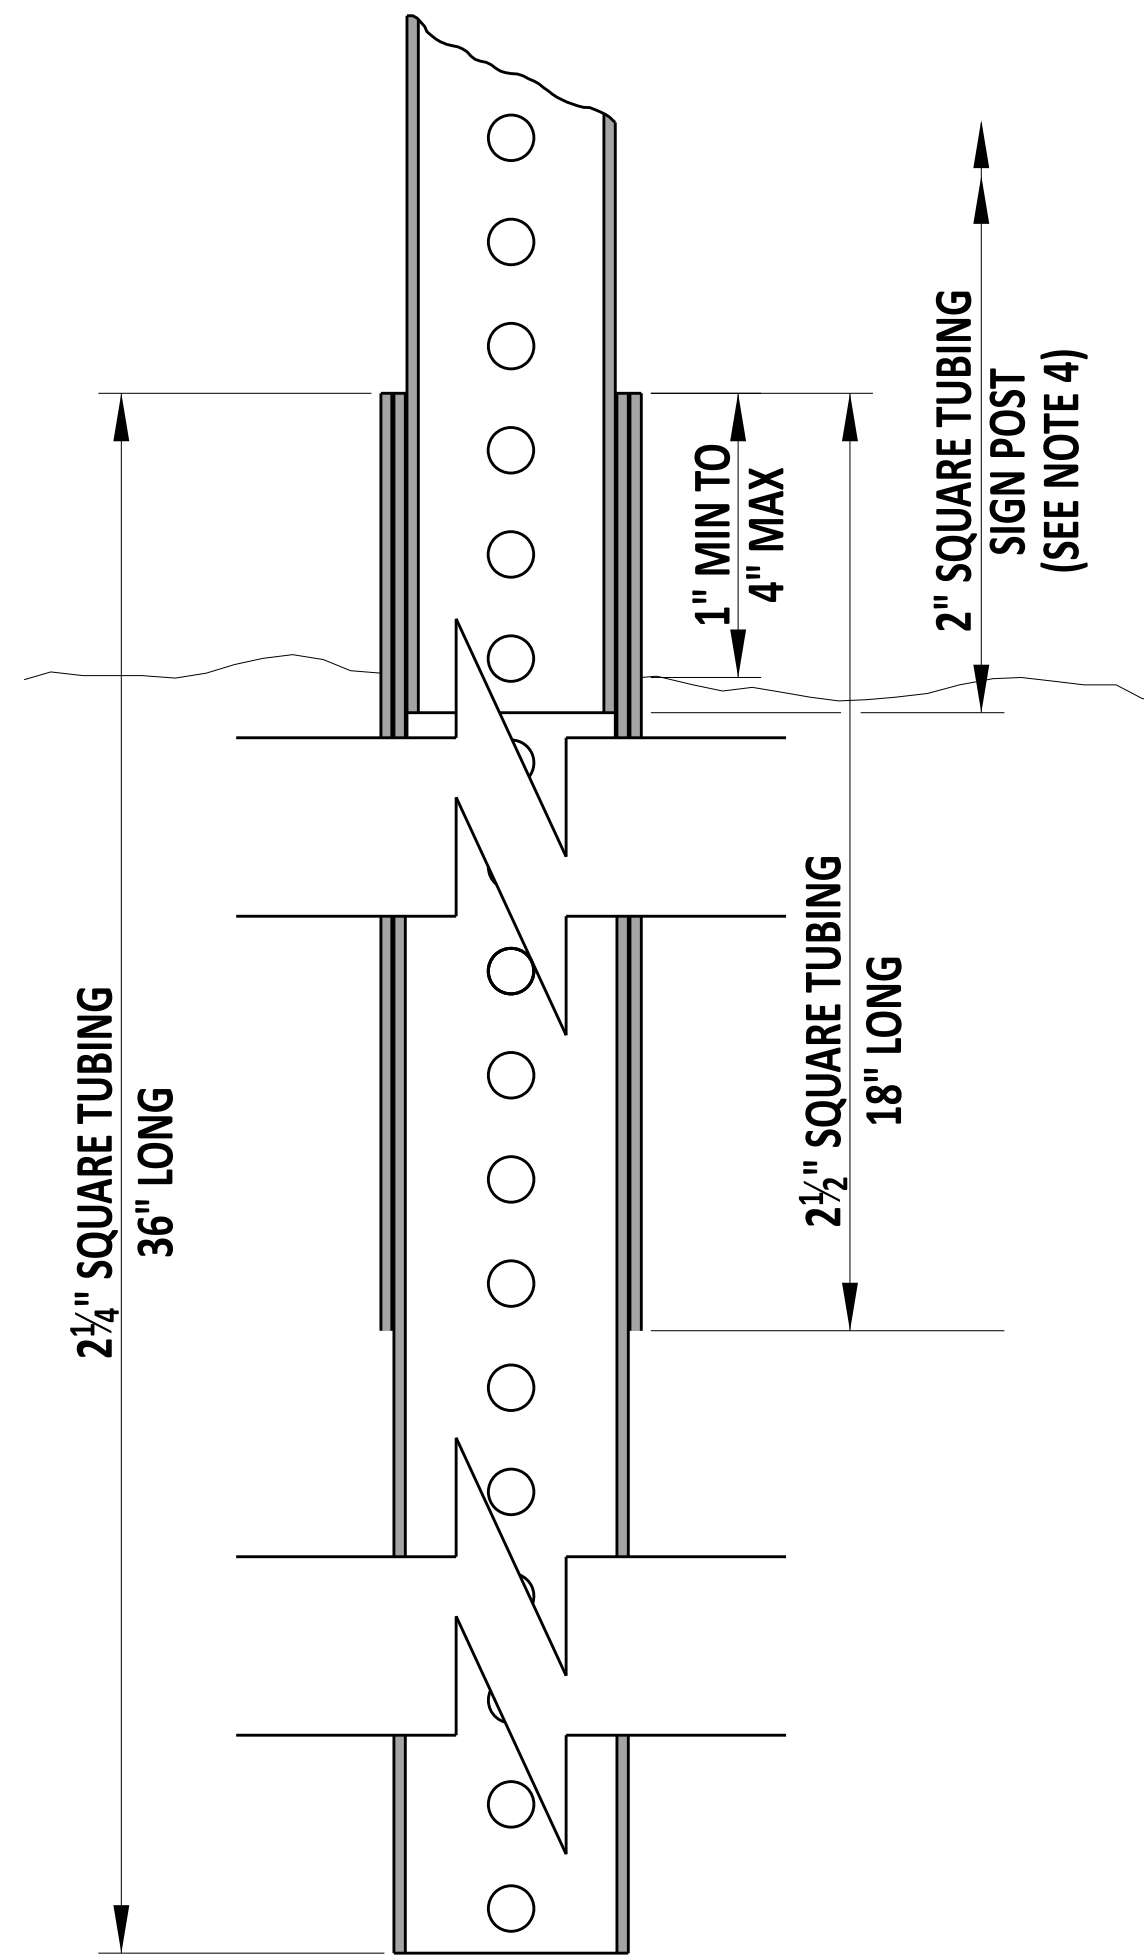


SQUARE POST SHALL NOT BE LESS THAN 2" x 2" WITH A WALL THICKNESS OF 0.1084" ± 0.008"

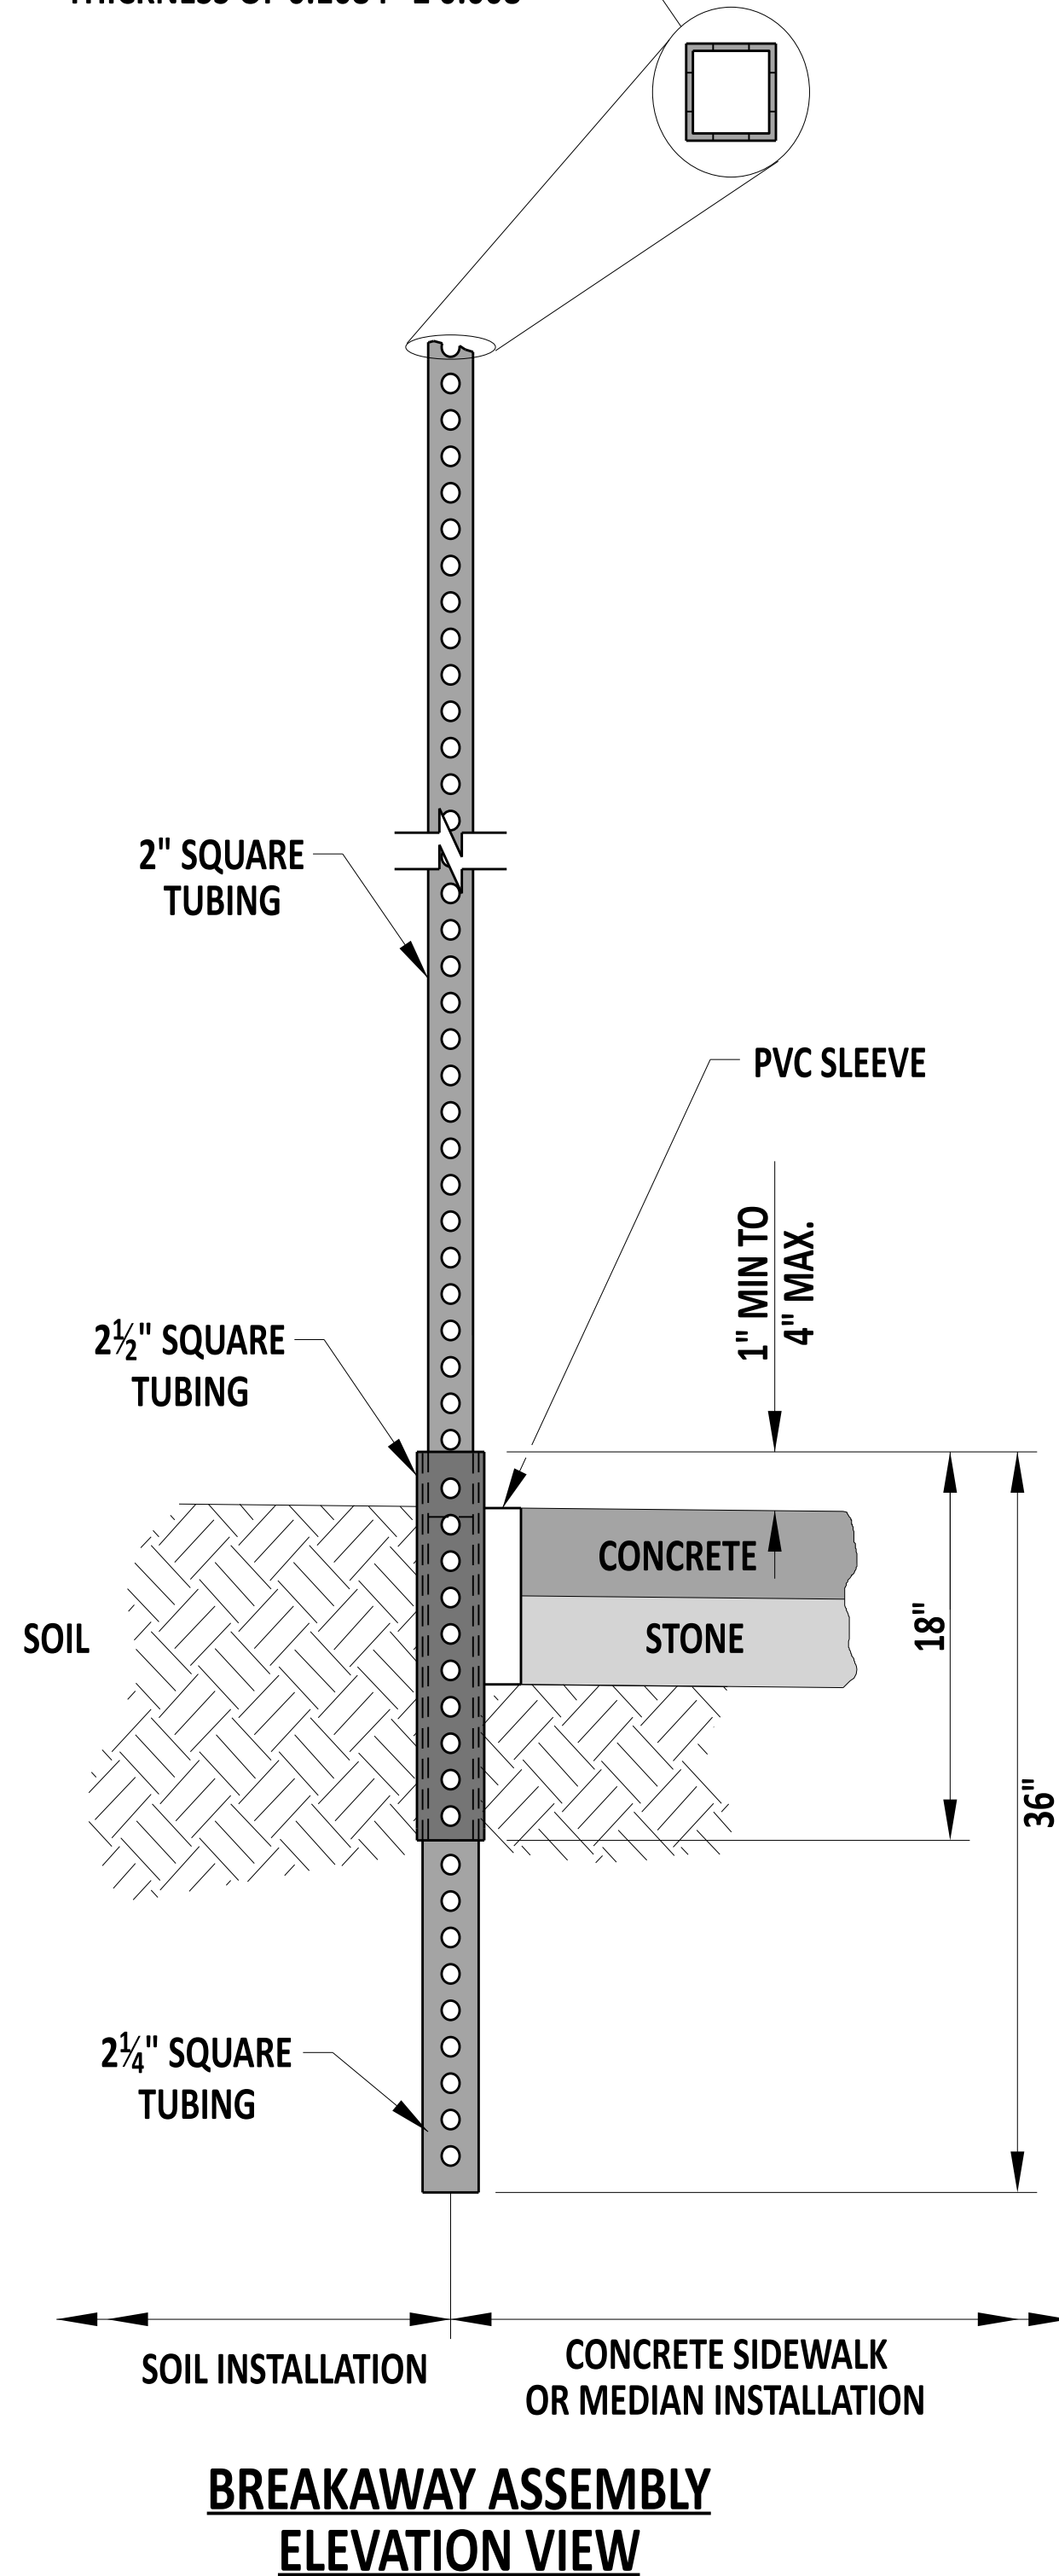

NOTE: THE PIN ASSEMBLY IS TO BE USED WITH THE INSTALLATION OF BACK TO BACK STREET BLADE SIGNS.

**NOTES:**

- 1). PROVIDE MATERIALS IN ACCORDANCE WITH SECTION 1072.1.
- 2). THE SIGN POST SHALL EXTEND A MINIMUM OF 4" INTO THE 2 1/2" SQUARE TUBING.
- 3). THE CONTRACTOR SHALL PROVIDE AND INSTALL PVC SLEEVES (4" INSIDE DIAMETER MINIMUM, 6" INSIDE DIAMETER MAXIMUM) IN PROPOSED CONCRETE SIDEWALKS, ISLANDS, AND MEDIANS FOR FUTURE TRAFFIC SIGN POSTS AS DIRECTED BY THE ENGINEER. THE LOWER END OF THE SLEEVE SHALL BE SET ON TOP OF THE SOIL. SIGNS SHOULD NOT BE PLACED WITHIN 10' OF THE NOSE OF A MEDIAN ISLAND, WHERE FEASIBLE.



Andrew Short  
ENGINEERING SUPPORT  
RECOMMENDED  
DATE: 12/22/2023

<b>BREAKWAY SIGN POST AND PIN ASSEMBLY DETAILS</b>				
STANDARD NO.	T-15 (2024)	SHT.	1	OF 1

REVIEWED  
DEPUTY DIRECTOR - DESIGN  
22 December 2023  
DATE

APPROVED  
CHIEF ENGINEER  
01/11/2024  
DATE