




ISOMETRIC VIEW
SHOWN WITH INTEGRAL CURB & GUTTER, TYPE 1-8

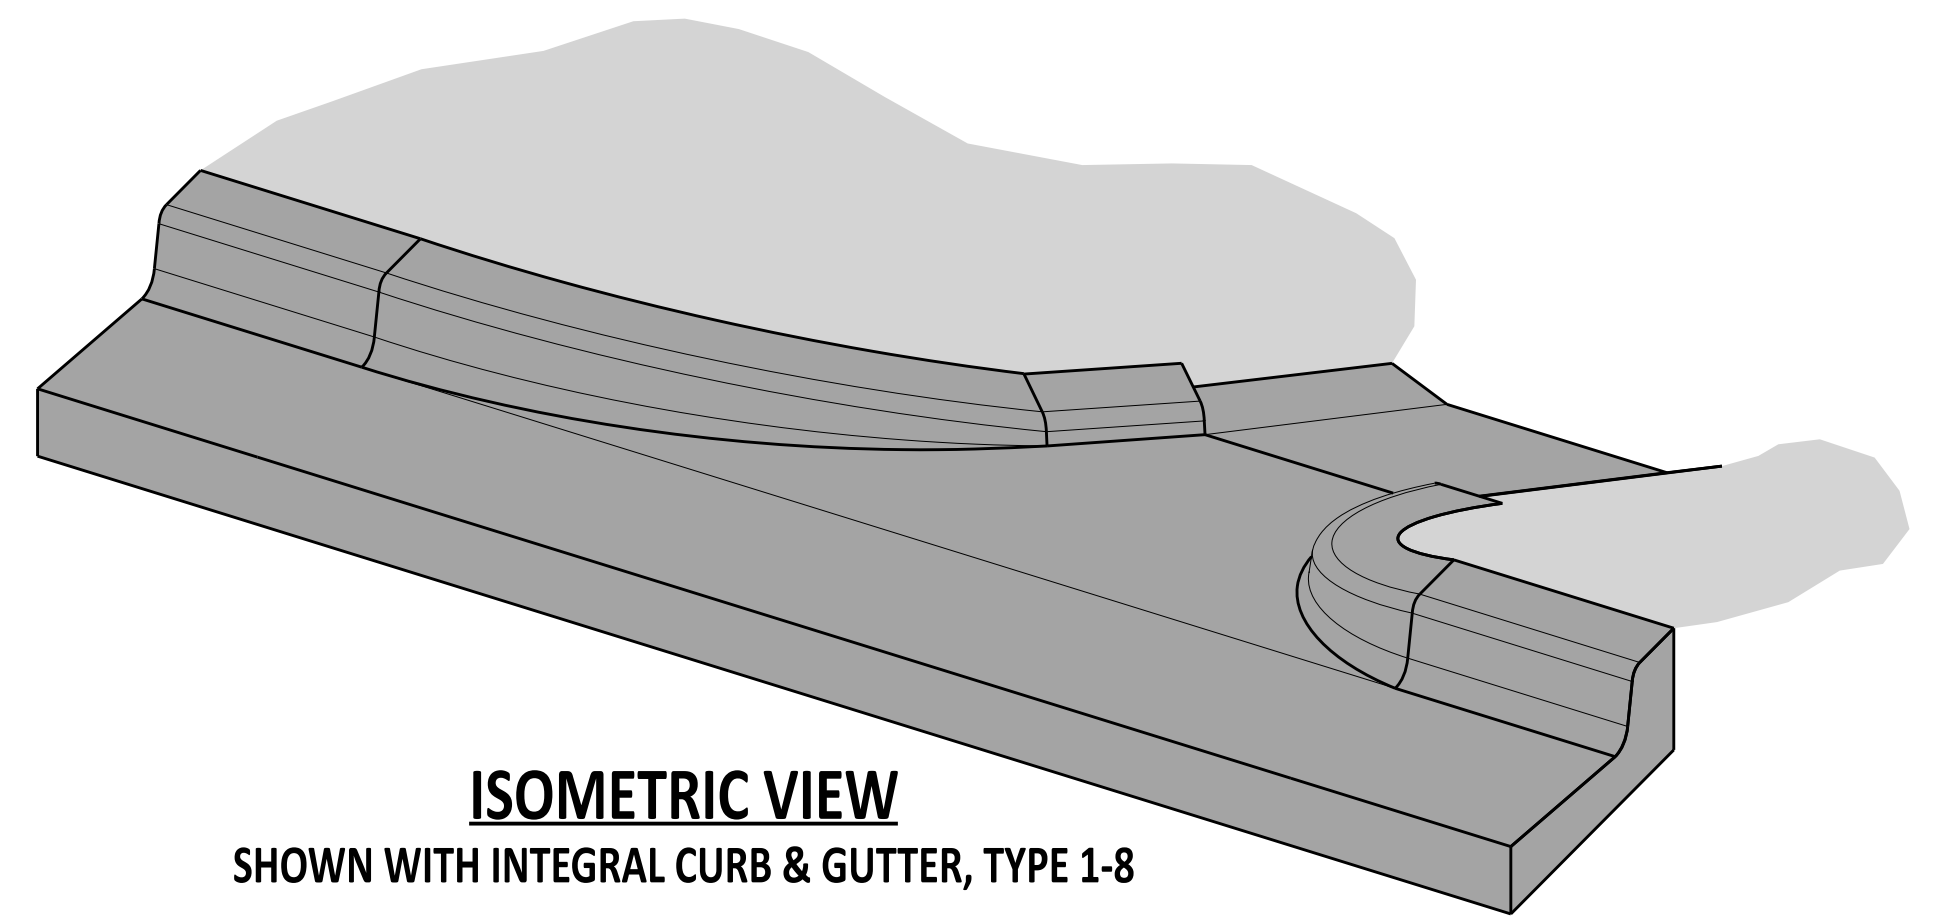


ISOMETRIC VIEW
SHOWN WITH INTEGRAL CURB & GUTTER, TYPE 1-8

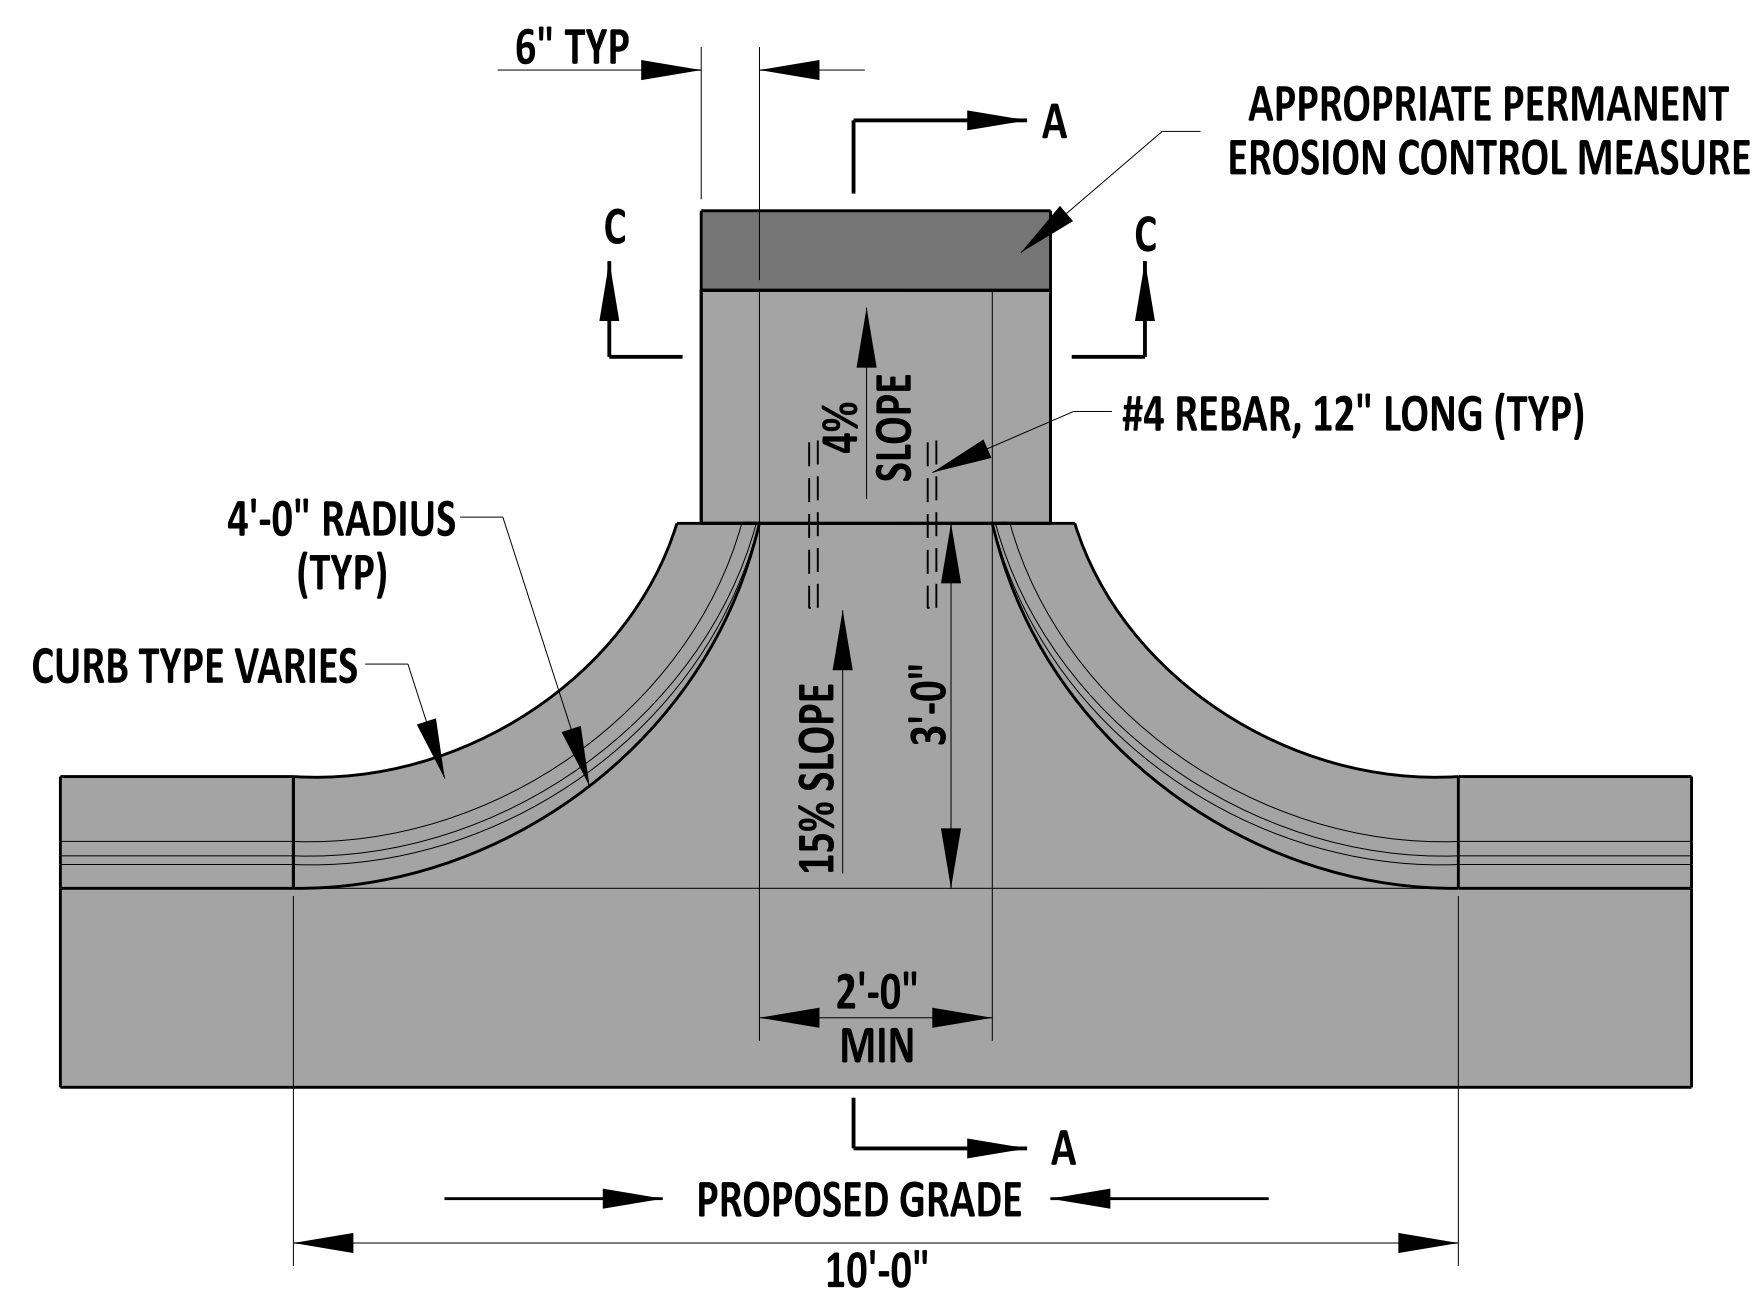


PLAN VIEW
IN SUMP LOCATION

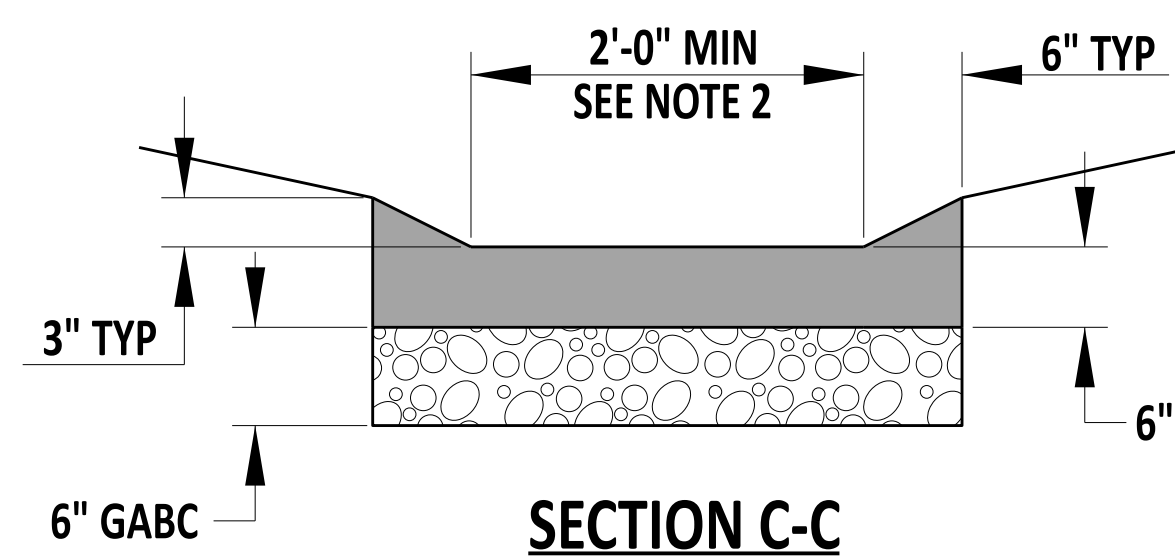

SECTION C-C

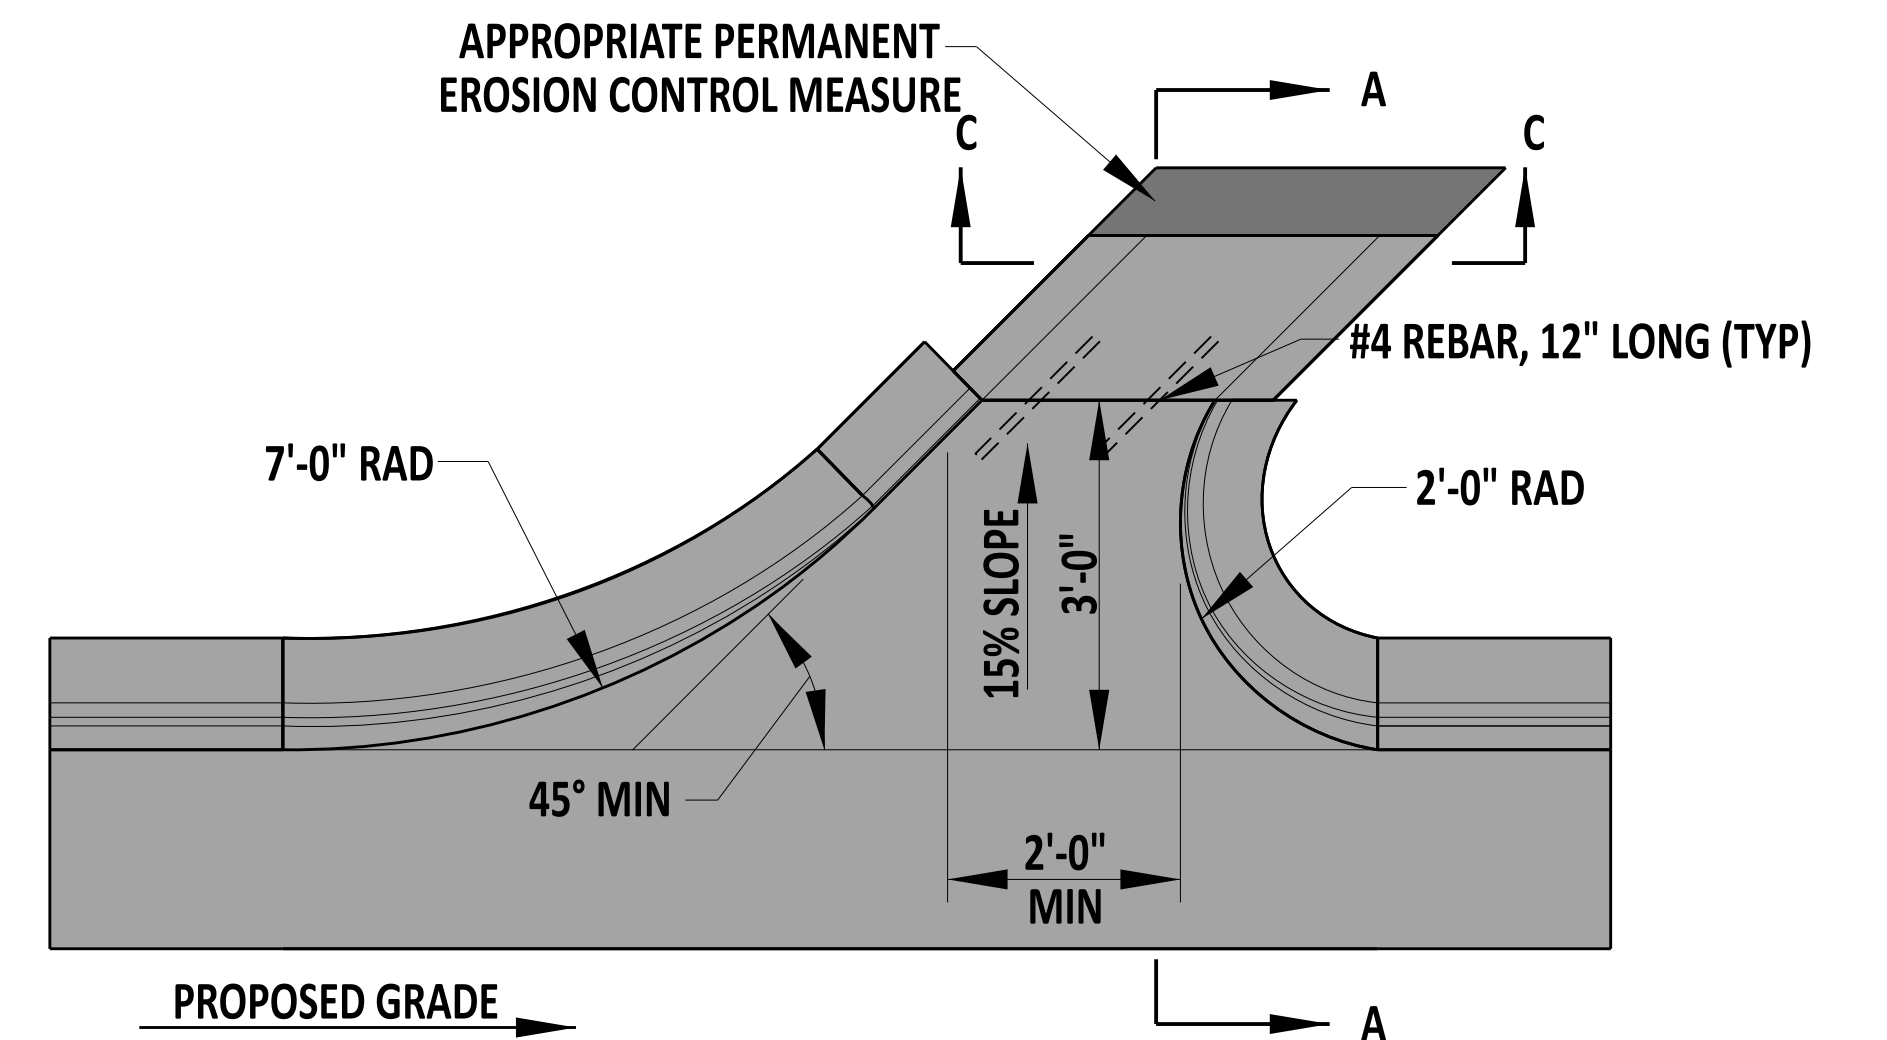

PLAN VIEW
ON GRADE OR SLOPE

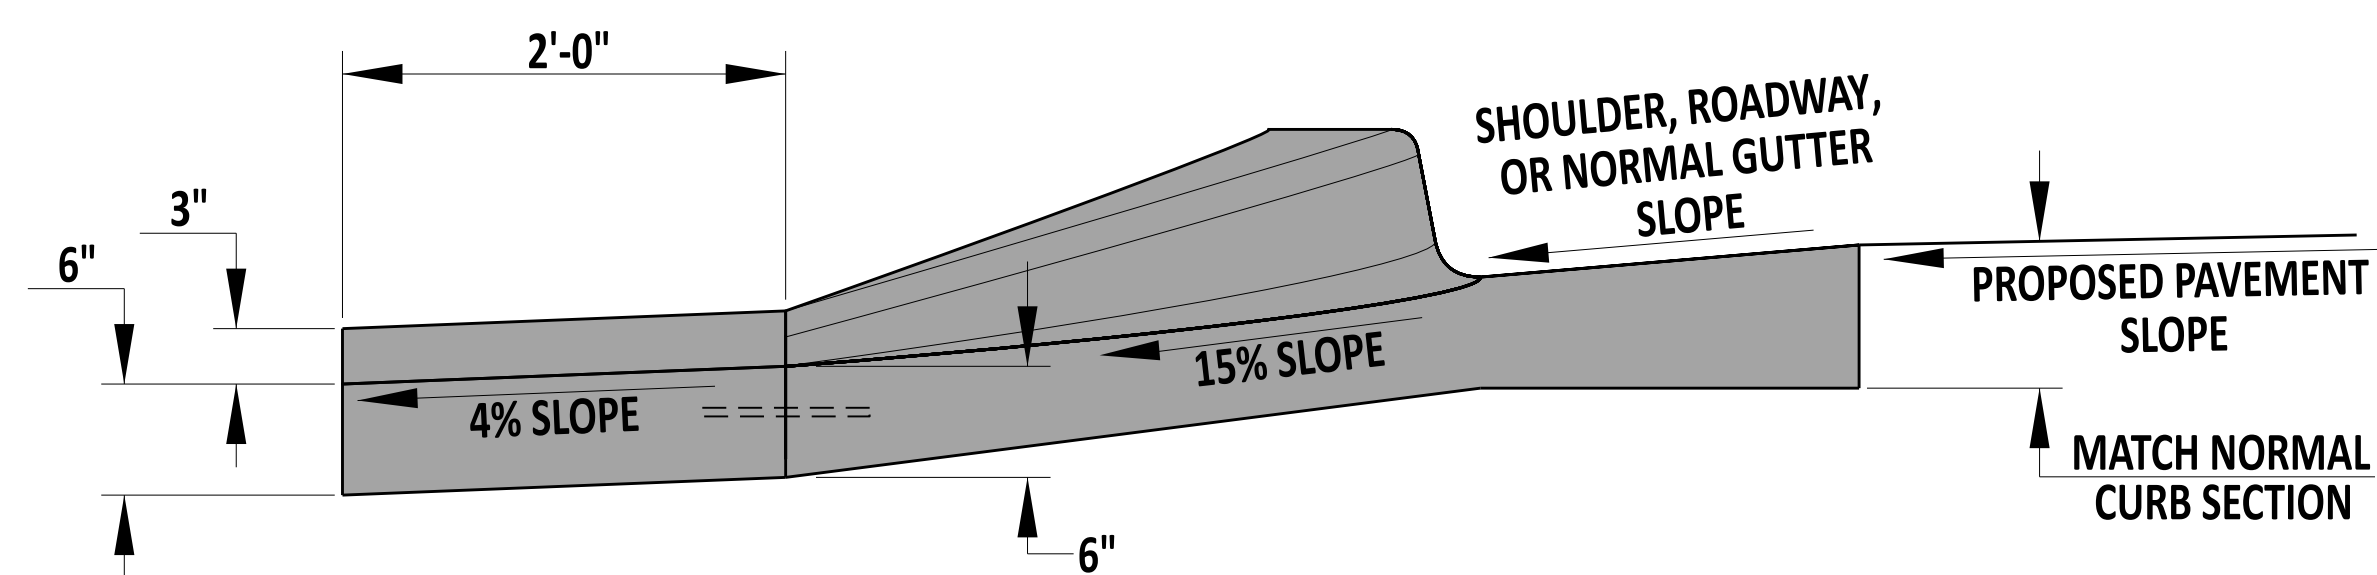

SECTION A-A

NOTES:

- 1). DESIGNER SHALL ESTABLISH WIDTH OF OPENING BASED ON DRAINAGE CALCULATIONS.
- 2). MATCH THE WIDTH OF THE APRON (SHOWN IN SECTION C-C) TO THE WIDTH OF THE CURB OPENING (SHOWN IN PLAN VIEW).
- 3). WHEN A SIDEWALK OPENING IS USED WHERE A GRASS BUFFER STRIP IS PRESENT, THIS DETAIL MAY BE USED IN CONJUNCTION WITH CURB/SIDEWALK OPENING DETAIL C-5. INCREASE THE WIDTH OF THE CURB OPENING CHANNEL TO MATCH THE WIDTH OF THE SIDEWALK OPENING. MODIFY DETAIL C-4 SECTION C-C TO MATCH DETAIL C-5 SECTION C-C.



Andrew Shott
ENGINEERING SUPPORT 12/22/2023
RECOMMENDED DATE

CURB OPENING
STANDARD NO. C-4 (2024) SHT. 1 OF 1

REVIEWED *[Signature]* 22 December 2023
DEPUTY DIRECTOR - DESIGN DATE
APPROVED *[Signature]* 01/11/2024
CHIEF ENGINEER DATE