


SECTION WITH SPALL ADJACENT TO JOINT

NOTES:

- 1). MATCH THE WIDTH OF THE CLOSED CELL POLYETHYLENE FOAM TO THE WIDTH OF THE JOINT.
- 2). AFTER THE REPAIR HAS ACHIEVED THE SPECIFIED STRENGTH, REMOVE THE FOAM, CLEAN JOINTS AND SEAL WITH HOT POUR SEALANT.

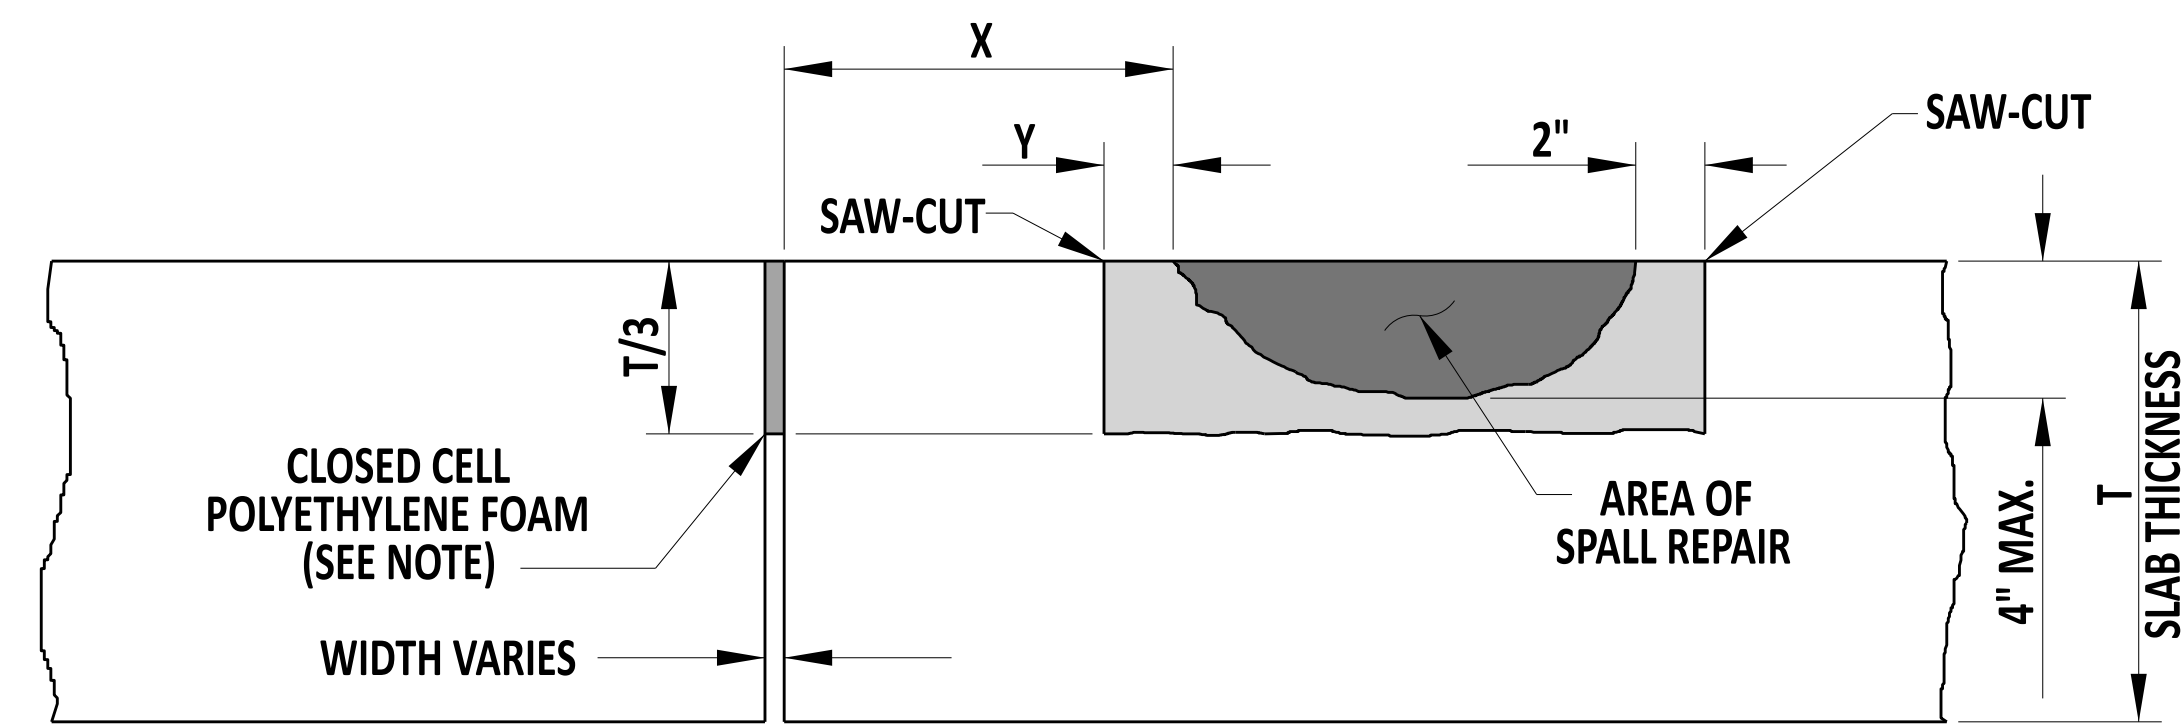

SECTION WITH SPALL NOT ADJACENT TO JOINT

NOTE: WHEN X > 12", THEN Y=1" AND POLYETHYLENE FOAM IS NOT USED.  
WHEN X ≤ 12", THEN Y=X AND POLYETHYLENE FOAM IS USED.

PARTIAL DEPTH PATCH



Andrew Short  
ENGINEERING SUPPORT  
RECOMMENDED  
DATE 12/22/2023

PARTIAL DEPTH PATCH, PLAN AND SECTION VIEWS  
STANDARD NO. P-2 (2024) SHT. 6 OF 6

REVIEWED  
APPROVED  
DEPUTY DIRECTOR - DESIGN  
CHIEF ENGINEER  
22 December 2023  
DATE  
01/11/2024  
DATE