


SECTION A-A



SECTION VIEW - STONE BARRIER

- NOTE:
- 1). EXTEND THE BOTTOM OF THE COMPOST FILTER LOG OR STONE BARRIER ABOVE THE TOP OF THE PIPE.
 - 2). IF COMPOST FILTER LOGS ARE USED, USE A MINIMUM OF 3 STAKES PER APPLICATION.
 - 3). IF COMPOST FILTER LOGS CAN NOT BE INSTALLED PROPERLY OR FLOW CONDITIONS EXCEED THE CAPABILITIES OF THE COMPOST FILTER LOGS, EMPLOY THE STONE BARRIER OPTION.
 - 4). PLACEMENT OF THE COMPOST LOG OR STONE BARRIER SHOULD BE IN A "HORSESHOE" SHAPE AND PROVIDE A MINIMUM OF 6 FEET OF CLEARANCE FROM THE CULVERT INLET.

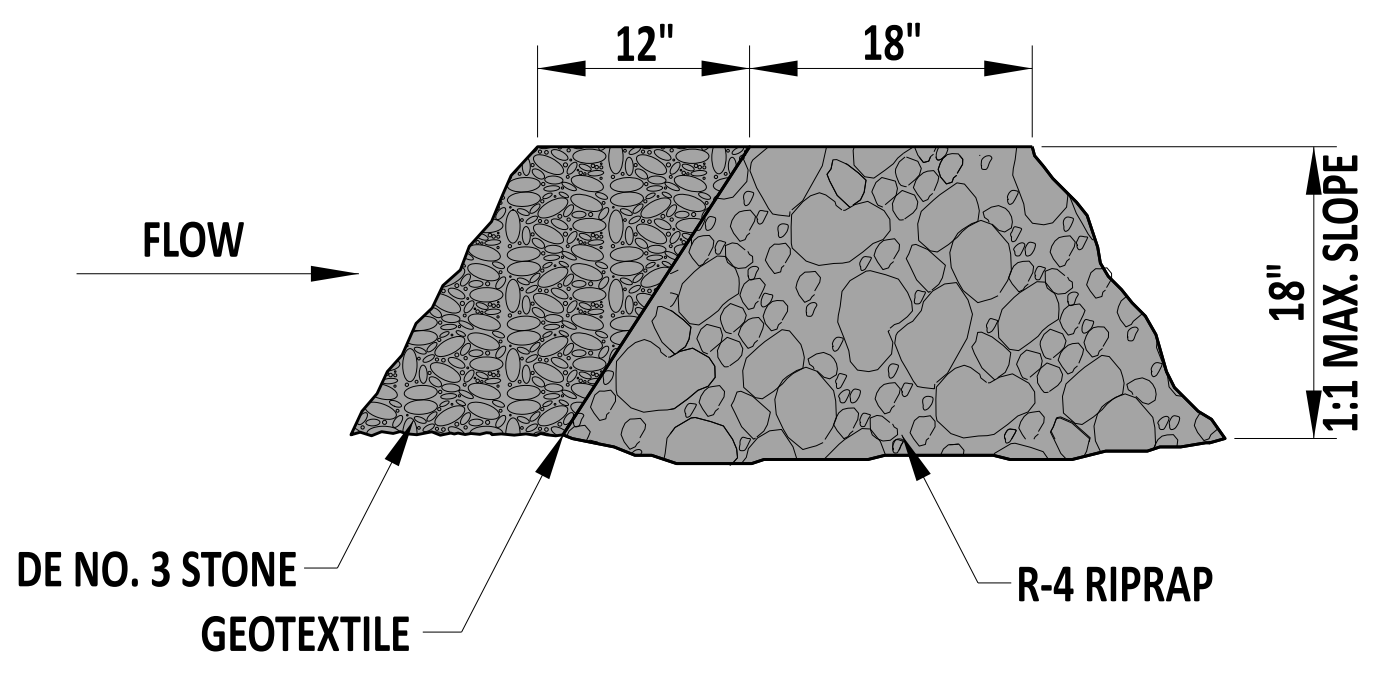

Andrew Shott
 ENGINEERING SUPPORT
 12/22/2023
 DATE
RECOMMENDED

INLET SEDIMENT CONTROL, CULVERT INLET

STANDARD NO. E-5 (2024) SHT. 1 OF 1

REVIEWED
 DEPUTY DIRECTOR - DESIGN
 22 December 2023
 DATE

APPROVED
 CHIEF ENGINEER
 01/11/2024
 DATE