




CHAMFER AND LOWER SETBACK DETAIL

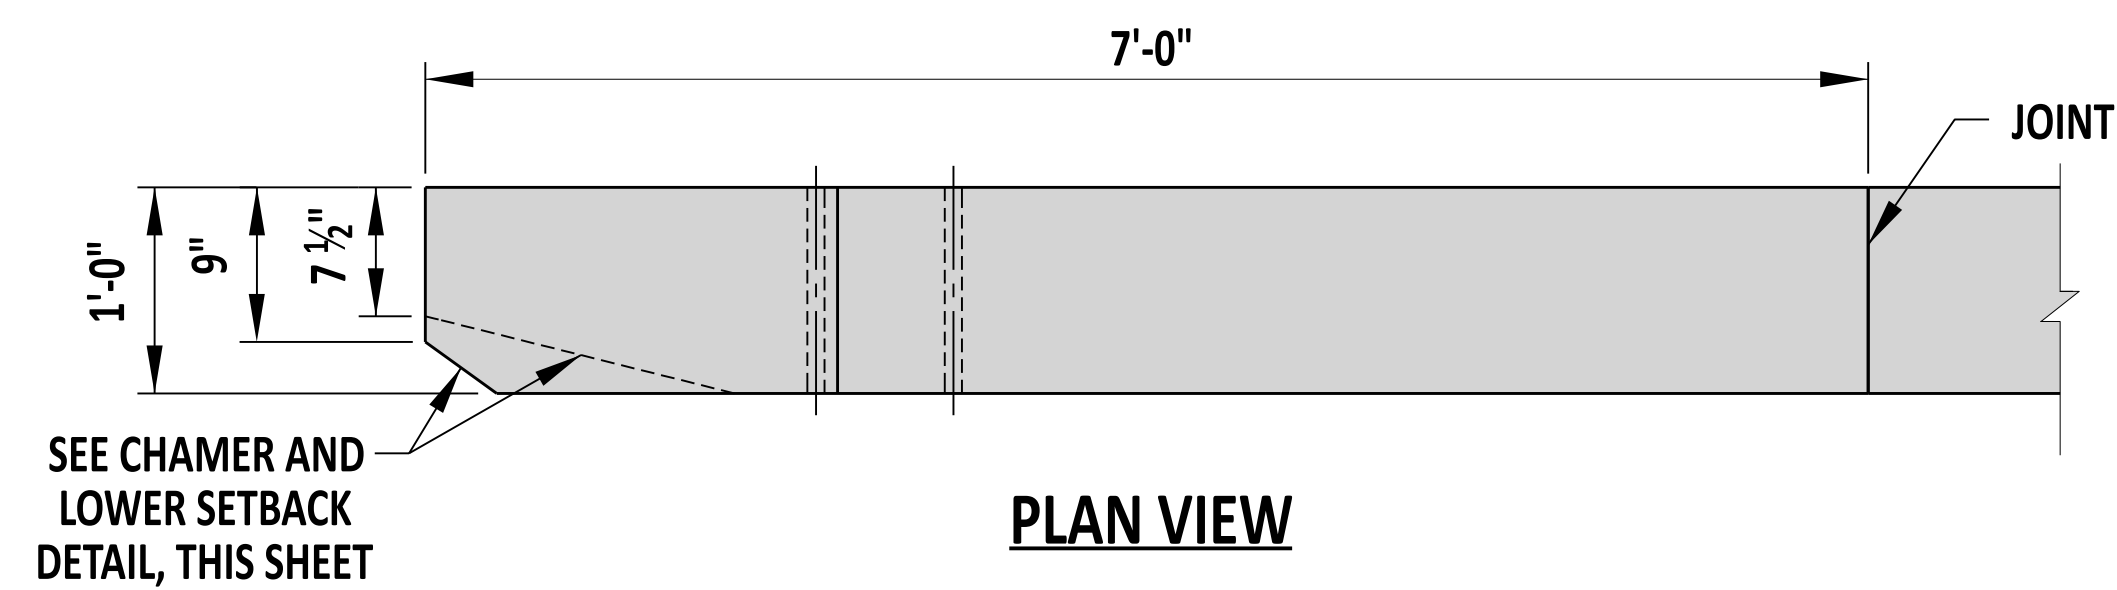

PLAN VIEW

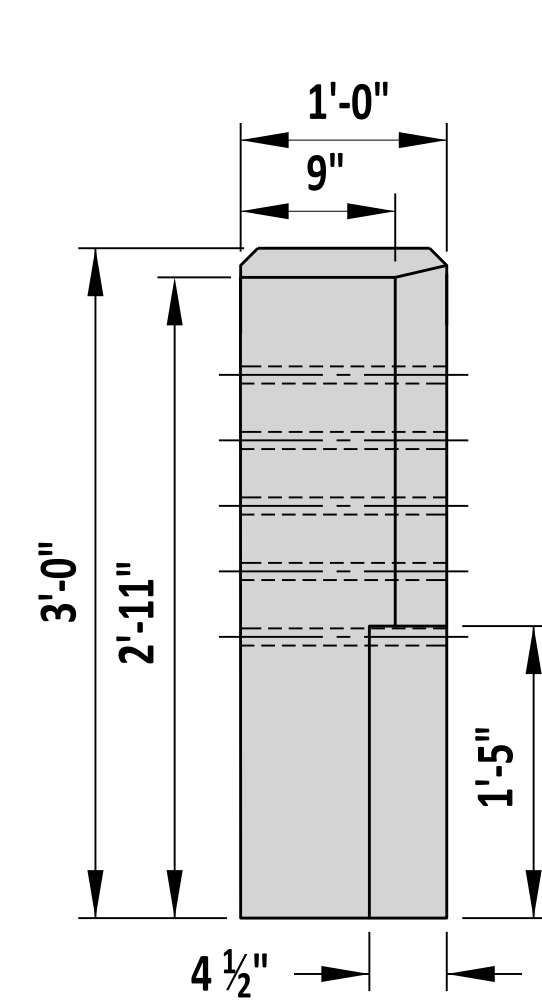

END VIEW

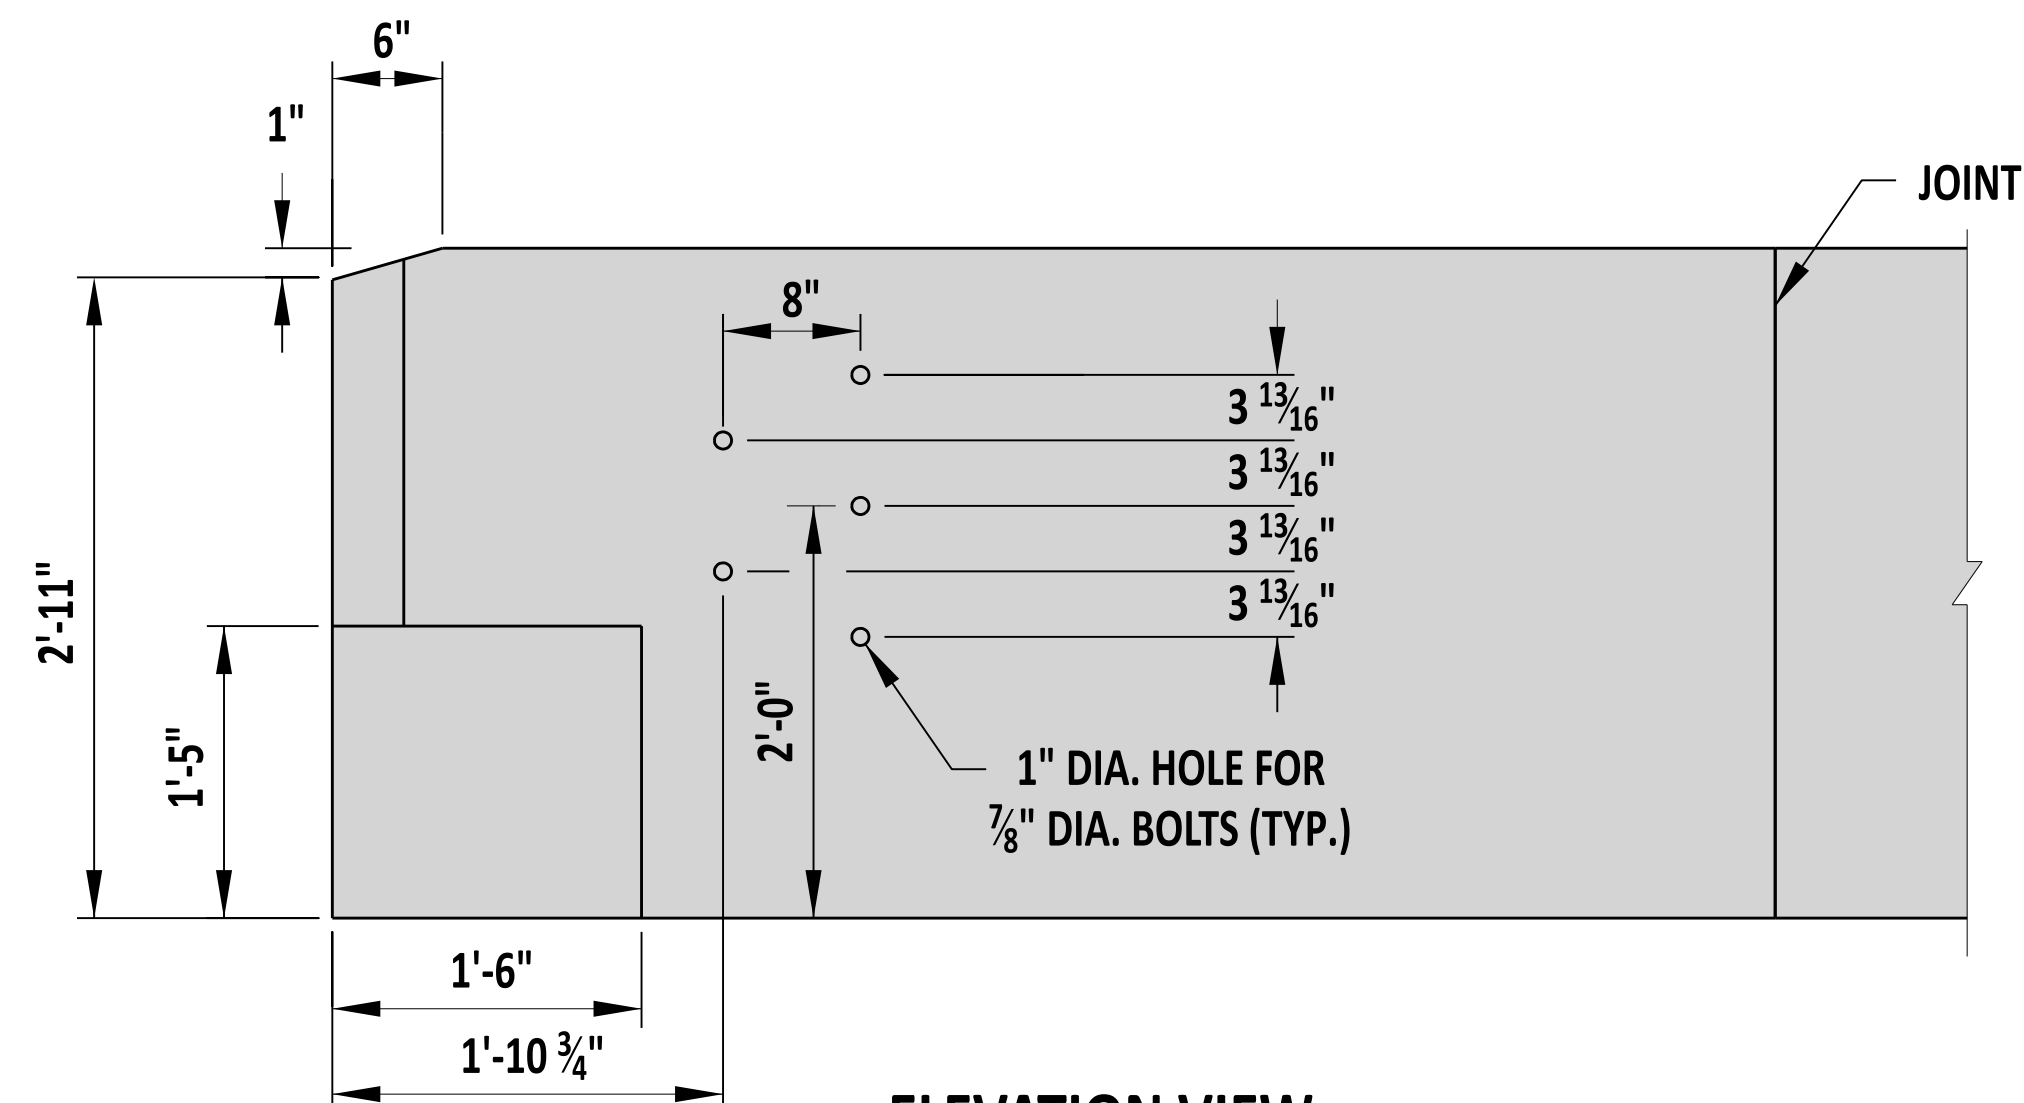

ELEVATION VIEW

NOTES:

- 1). THRIE-BEAM GUARDRAIL NOT SHOWN. SEE STANDARD NO. B-10 FOR MORE INFORMATION ON THRIE-BEAM CONNECTION.
- 2). FOUNDATION NOT SHOWN. FOR ROADSIDE BARRIER APPLICATIONS BUTTRESS SHALL BE CONSTRUCTED ON A MINIMUM 2'-0" WIDE x 2'-0" DEEP FOOTING OVER 8" OF GABC.
- 3). CHAMFER ALL EXPOSED EDGES 3/4" x 3/4", UNLESS NOTED OTHERWISE.
- 4). SEE SHEET 2 FOR BUTTRESS REINFORCEMENT.

TL-3



Andrew Short
 ENGINEERING SUPPORT 12/22/2023
 DATE
RECOMMENDED

THRIE-BEAM APPROACH GUARDRAIL TRANSITION (AGT) TO CONCRETE BUTTRESS

STANDARD NO.	B-11 (2024)	SHT.	1	OF	8
--------------	-------------	------	---	----	---

REVIEWED	<i>[Signature]</i> DEPUTY DIRECTOR - DESIGN	22 December 2023 DATE
APPROVED	<i>[Signature]</i> CHIEF ENGINEER	01/11/2024 DATE