

NOTES

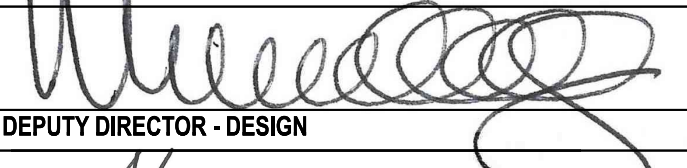

- 1). ALL PRUNING SHALL BE DONE BY OR UNDER THE DIRECTION OF, AN I.S.A. CERTIFIED ARBORIST OR CERTIFIED NURSERY PROFESSIONAL. DO NOT HEAVILY PRUNE TREES AT PLANTING.
- 2). ALL DEAD, BROKEN, & CROSSING BRANCHES SHALL BE PRUNED OFF FOLLOWING INSTALLATION.
- 3). BASE OF PLANTING PIT SIZE SHALL BE A MINIMUM WIDTH OF TWICE THE ROOT BALL SIZE AND A MAXIMUM OF THREE TIMES THE ROOT BALL SIZE.
- 4). WHEN PLANTING TREES ALONG STREETS, THERE MUST BE A MINIMUM OF 6' BETWEEN THE BACK OF CURB AND THE EDGE OF SIDEWALK AND SHALL BE CENTERED BETWEEN THE BACK OF CURB AND THE EDGE OF SIDEWALK.
- 5). WHEN PLANTING TREES ALONG SIDEWALKS, THE TREE SHALL BE LIMBED TO 7' FOR PEDESTRIAN CLEARANCE.

**TREE PLANTING DETAIL**



  
 Andrew Shott  
 ENGINEERING SUPPORT  
 12/22/2023  
 DATE  
**RECOMMENDED**

PLANTING DETAILS			
STANDARD NO.	L-1 (2024)	SHT.	2 OF 4

**REVIEWED**  
  
 DEPUTY DIRECTOR - DESIGN  
 22 December 2023  
 DATE  
**APPROVED**  
  
 CHIEF ENGINEER  
 01/11/2024  
 DATE